

## QWCA-112-SF-E

### WR-112 to SMA female, End launch

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

#### Electrical

Frequency: 6.57–9.99GHz  
VSWR: 1.2 max.  
Impedance: 50Ω

#### Mechanical

Length: 60mm  
2.362in  
RF Connectors: SMA Female  
Interface: WR-112  
Flange: FBP84 or FDP84  
Material: Aluminium


#### How To Order

**QWCA-112-SF-E-B - Outline A**


**QWCA-112-SF-E-D - Outline B**

Customization is available upon request.

#### Outline Drawings

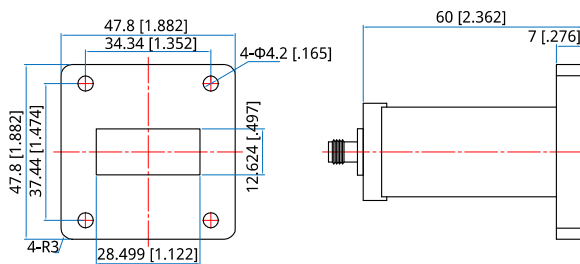

Outline A

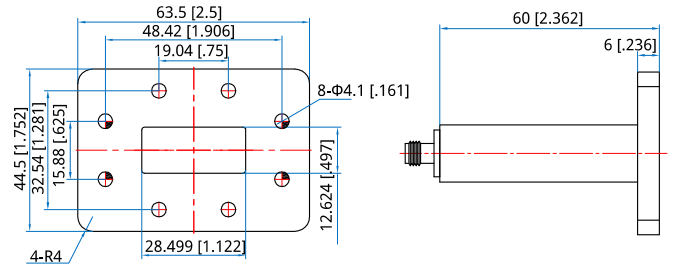

Outline B

Unit: mm [in]      Tolerance: ±0.2mm [±0.008in]