


# QFA18K3

## DC~18GHz, 300W

Features:  
 \* Low VSWR  
 \* High Attenuation Flatness

Applications:  
 \* Wireless  
 \* Transmitter  
 \* Laboratory Test  
 \* Radar

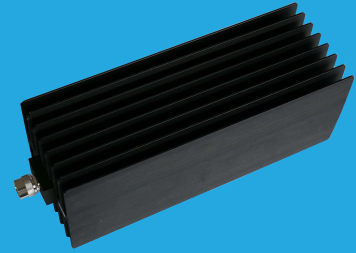

### Electrical

Frequency: DC~18GHz  
 Attenuation: 3, 6, 10~60dB  
 Impedance: 50Ω  
 Average Power\*1: 300W@25°C max.

[1] Derated linearly to 15W@120°C.

### Mechanical

RF Connectors: N Male, N Female


### Environmental

Temperature: -55~+125°C


### Attenuation Accuracy and VSWR

Frequency (GHz)	Attenuation Accuracy (±dB) vs. Attenuation (dB)								VSWR (max.)
	3	6	10	20	30	40	50	60	
DC~3	0.5	-	-	-	-	-	-	-	1.20
DC~4	-	-	0.7	0.7	0.8	0.9	0.9	0.9	1.20
DC~6	1	1.2	-	-	-	-	-	-	1.25
DC~8	-	-	0.8	0.8	0.9	0.9	0.9	0.9	1.25
DC~12.4	-	-	3.0	0.9	1.0	1.1	1.1	1.1	1.35
DC~18	-	-	3.5	-	1.5	1.3	1.3	1.4	1.45


### Outline Drawings

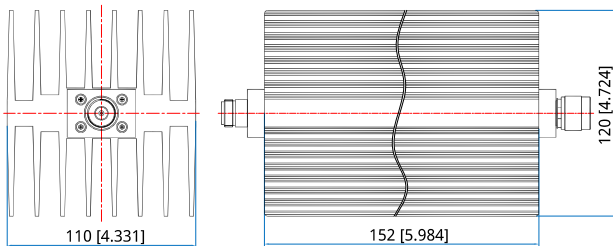

Outline A

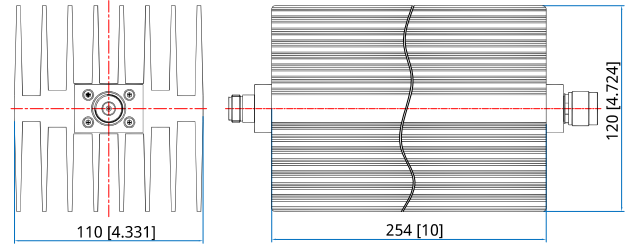

Outline B

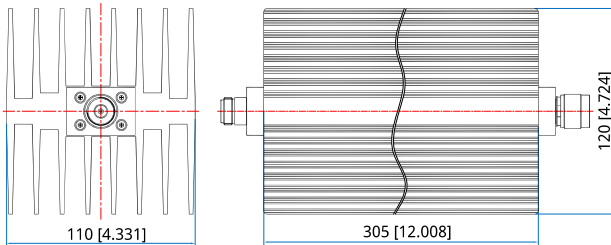

Outline C

Unit: mm [in]      Tolerance: ±2mm [±0.08in]

**How To Order****QFA18K3-X-Y-Z**

X: Frequency in GHz

Y: Attenuation in dB

3dB, DC~3GHz - Outline A

6dB, DC~6GHz - Outline B

10~60dB, DC~18GHz - Outline C

Z: Connector type

## Examples:

To order an attenuator, DC-18GHz, N male to N female, 30dB attenuation, specify QFA18K3-18-30-N.

## Connector naming rules:

N - N