

Anritsu envision : ensure

Microwave Peak USB Power Sensors

Low Cost, Compact, and Highly Accurate Peak
Power Sensors for RF and Microwave Applications

MA24406A

Peak, 50 MHz to 6 GHz

MA24418A

Peak, 50 MHz to 18 GHz

MA24440A

Peak, 50 MHz to 40 GHz

MA24419A

Peak, 50 MHz to 18 GHz

MA24441A

Peak, 50 MHz to 40 GHz



Introduction

The MA244xxA Series of Microwave Peak Power Sensors are designed to provide accurate, peak power measurements from 50 MHz to 6 GHz, 18 GHz, and 40 GHz with up to 80 dB of dynamic range and 195 MHz of video bandwidth. The sensors employ a parallel processing methodology that performs the multi-step process of RF power measurement at incredible, unmatched speeds. While conventional power meters and USB sensors perform steps serially, resulting in long re-arm times and missed data, Anritsu sensors capture, display, and measure every pulse, glitch, and detail with virtually no gaps in data and zero latency.

Features and Benefits

- 6 GHz, 18 GHz, and 40 GHz RF Power Sensors
- Up to 195 MHz video bandwidth with 3 ns rise time
- 100,000 measurements per second
- 10 GSa/s effective sample rate
- 100 MSa/s continuous sample rate
- Crest factor and statistical measurements (e.g. CCDF)
- Synchronized multi-channel measurements
- Microwave Peak Power Analyzer advanced measurement and analysis software



MA244xxA Microwave Peak Power Sensors

Table of Contents

Definitions 3

Frequency Range 4

Power Measurement 4

 Dynamic Range 4

 VSWR (max) 4

 Damage Level 4

 Response 4

Triggering 4

 Internal Trigger 4

 External Trigger 4

Peak Power Analyzer 5

 PC Requirements 5

 General 5

 Environmental Requirements 5

 Regulatory Compliance 5

Ordering Information 6

 Available Models 6

 Available Options 6

 Included Accessories 6

Optional Accessories 6

 Attenuators 6

 Coaxial Adapters 6

Notes: 7

Definitions

<p>Warm-Up Time</p> <p>Operating Temperature Range</p> <p>Characteristic Performance</p> <p>Calibration Cycle</p>	<p>60 minutes</p> <p>0 °C to 50 °C</p> <p>Characteristic specifications are not tested and are not warranted.</p> <p>Anritsu recommended calibration interval is 12 months.</p> <p>All specifications subject to change without notice. For the most current data sheet, please visit the Anritsu web site: www.anritsu.com</p>
---	--

Frequency Range

Model	MA24406A	MA24418A	MA24419A	MA24440A	MA24441A
Frequency Range	50 MHz to 6 GHz	50 MHz to 18 GHz	50 MHz to 18 GHz	50 MHz to 40 GHz	50 MHz to 40 GHz

Power Measurement

Dynamic Range

Model	MA24406A	MA24418A	MA24419A	MA24440A	MA24441A
Average	-60 to +20 dBm	-34 to +20 dBm	-50 to +20 dBm	-34 to +20 dBm	-50 to +20 dBm
Pulse	-50 to +20 dBm	-24 to +20 dBm	-40 to +20 dBm	-24 to +20 dBm	-40 to +20 dBm

VSWR (max)

Model	MA24406A	MA24418A	MA24419A	MA24440A	MA24441A
(GHz)	1.25 (0.05 to 6)	1.15 (0.05 to 2.0) 1.28 (2.0 to 16) 1.34 (16 to 18)	1.15 (0.5 to 2.0) 1.20 (2.0 to 6.0) 1.28 (6.0 to 16) 1.34 (16 to 18)	1.25 (0.05 to 4.0) 1.65 (4.0 to 38) 2.00 (38 to 40)	1.25 (0.05 to 4.0) 1.65 (4.0 to 38) 2.00 (38 to 40)

Damage Level

RF Port Input	+23 dBm, ±10.0 VDC (+30 dBm peak for 1 µs), minimum
---------------	---

Response

Model	MA24406A	MA24418A	MA24419A	MA24440A	MA24441A
Single Channel Rise Time (fast/std)	3 ns/<10 µs	5 ns/<10 µs	<100 ns/<10 µs	5 ns/<10 µs	<100 ns/<10 µs
Video Bandwidth (fast/std)	195 MHz/350 kHz	70 MHz/350 kHz	6 MHz/350 kHz	70 MHz/350 kHz	6 MHz/350 kHz
Single Shot Bandwidth	35 MHz	35 MHz	6 MHz	35 MHz	6 MHz
Sampling Rate	100 MSa/s, characteristic				
Effective Sampling Rate	10 GSa/s, characteristic				

Triggering

Source	Continuous, Internal, External TTL, Crossover (from another sensor)
Arm Type	Continuous, Single, Trigger Holdoff, Frame (gap) Holdoff

Internal Trigger

Model	MA24406A	MA24418A	MA24419A	MA24440A	MA24441A
Dynamic Range	-38 to +20 dBm	-10 to +20 dBm	-27 to +20 dBm	-10 to +20 dBm	-27 to +20 dBm
Min Pulse Width (fast/std)	10 ns/3 µs	10 ns/3 µs	200 ns/3 µs	10 ns/3 µs	200 ns/3 µs
Slope	Positive or Negative				
Trigger Holdoff	100 ns to 1 s with 10 ns resolution				

External Trigger

External Trigger Input	SMB (female)
Impedance	10 kΩ
Type	TTL
Slope	Positive or Negative
High Level Input Voltage	2.4 V min, 5.5 V max
Low Level Input Voltage	-0.1 V min, 0.7 V max
Latency	< 10 ns (Latency is defined as the time delay between the defined edge of the applied trigger and the sensor switching into the triggered state.)
Trigger Pulse Width	10 ns min
Trigger Repetition Period	20 ns min
Trigger Hold Off	100 ns to 1 s with 10 ns resolution


Peak Power Analyzer

PC Requirements

Processor	1.3 GHz or higher recommended
RAM	512 MB (1 GB or more recommended)
Operating System	Microsoft® Windows® 10 Microsoft® Windows® 8 (32-bit and 64-bit) Microsoft® Windows® 7 (32-bit and 64-bit)
Hard-Disk Free Space	Min 1.0 GB free space to install and run
Display Resolution	800x600 (1280x1024 or higher recommended)
Interface	USB 2.0 high speed

General

RF Connector	N male (MA24406A, MA24418A, MA24119A) 2.92 mm male (MA24440A, MA24441A)
Interface to Host	USB 2.0 high speed
Size	145 mm x 43 mm x 43 mm, excluding N connector
Weight	363 g (0.8 lb)
Warranty	3 year

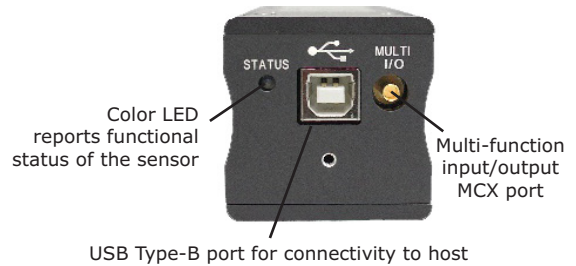

Environmental Requirements

Operating Temperature Range	0 °C to 55 °C	Tests were performed per MIL-28800F (Class3).
Storage Temperature Range	-40 °C to +70 °C	
Relative Humidity (non-condensing)	45 % at 50 °C 75 % at 40 °C 95 % at 30 °C	
Altitude	3048 m operational max	
Shock	30 g half-sine, 11 ms duration	
Vibration	Sinusoidal: 5 Hz to 55 Hz, 3 g max Random: 10 Hz to 500 Hz, 2.34 g rms Power Spectral Density: 0.01 g2/Hz	

Regulatory Compliance

European Union	EMC Directive 2014/30/EU, EN 61326:2013 CISPR 11/EN 55011:2019+A1:2010 Class A Equipment IEC/EN 61000-4-2/3/4/6 Low Voltage Directive 2014/35/EU EN 61010-1:2010 RoHS Directive 2015/863/EU
----------------	--

Ordering Information

Available Models

MA24406A	50 MHz to 6 GHz
MA24418A	50 MHz to 18 GHz
MA24419A	50 MHz to 18 GHz
MA24440A	50 MHz to 40 GHz
MA24441A	50 MHz to 40 GHz

Available Options

MA24406A-097	Accredited Calibration to ISO/IEC 17025 and ANSI/NCSL Z540-1 or ANSI/NCSL Z540.3 (includes test report, uncertainty data, and accreditation symbol)
MA24418A-097	Accredited Calibration to ISO/IEC 17025 and ANSI/NCSL Z540-1 or ANSI/NCSL Z540.3 (includes test report, uncertainty data, and accreditation symbol)
MA24419A-097	Accredited Calibration to ISO/IEC 17025 and ANSI/NCSL Z540-1 or ANSI/NCSL Z540.3 (includes test report, uncertainty data, and accreditation symbol)

Included Accessories

11410-00976	Information Card
806-390-R	0.9 m BNC (m) to SMB (m) cable
806-389-R	0.9 m SMB (m) to SMB (m) cable
806-391-R	1.8 m USB A (m) to USB B (m) cable

Optional Accessories

Attenuators

3-1010-122	Attenuator, DC to 12.4 GHz, 20 dB, 5 W, N(m) to N(f), 50 Ω
3-1010-123	Attenuator, DC to 8.5 GHz, 30 dB, 50 W, N(m) to N(f), 50 Ω
3-1010-124	Attenuator, DC to 8.5 GHz, 40 dB, 100 W, N(f) to N(m), 50 Ω
42N50-20	Attenuator, DC to 18 GHz, 20 dB, 5 W, N(m) to N(f), 50 Ω
42N50A-30	Attenuator, DC to 18 GHz, 30 dB, 50 W, N(m) to N(f), 50 Ω
43KB-3	Fixed Attenuator, 3 dB, DC to 26.5 GHz, K(m) to K(f), 50 Ω
43KB-6	Fixed Attenuator, 6 dB, DC to 26.5 GHz, K(m) to K(f), 50 Ω
43KB-10	Fixed Attenuator, 10 dB, DC to 26.5 GHz, K(m) to K(f), 50 Ω
43KB-20	Fixed Attenuator, 20 dB, DC to 26.5 GHz, K(m) to K(f), 50 Ω
43KC-3	Fixed Attenuator, 3 dB, DC to 40 GHz, K(m) to K(f), 50 Ω
43KC-6	Fixed Attenuator, 6 dB, DC to 40 GHz, K(m) to K(f), 50 Ω
43KC-10	Fixed Attenuator, 10 dB, DC to 40 GHz, K(m) to K(f), 50 Ω
43KC-20	Fixed Attenuator, 20 dB, DC to 40 GHz, K(m) to K(f), 50 Ω
41KB-3	Precision Fixed Attenuator, 3 dB, DC to 26.5 GHz, K(m) to K(f), 50 Ω
41KB-6	Precision Fixed Attenuator, 6 dB, DC to 26.5 GHz, K(m) to K(f), 50 Ω
41KB-10	Precision Fixed Attenuator, 10 dB, DC to 26.5 GHz, K(m) to K(f), 50 Ω
41KB-20	Precision Fixed Attenuator, 20 dB, DC to 26.5 GHz, K(m) to K(f), 50 Ω
41KC-3	Precision Fixed Attenuator, 3 dB, DC to 40 GHz, K(m) to K(f), 50 Ω
41KC-6	Precision Fixed Attenuator, 6 dB, DC to 40 GHz, K(m) to K(f), 50 Ω
41KC-10	Precision Fixed Attenuator, 10 dB, DC to 40 GHz, K(m) to K(f), 50 Ω
41KC-20	Precision Fixed Attenuator, 20 dB, DC to 40 GHz, K(m) to K(f), 50 Ω

Coaxial Adapters

510-90-R	Adapter, DC to 3.3 GHz, N(m) to 7/16 DIN(f), 50 Ω
510-91-R	Adapter, DC to 3.3 GHz, N(f) to 7/16 DIN(f), 50 Ω
510-92-R	Adapter, DC to 3.3 GHz, N(m) to 7/16 DIN(m), 50 Ω
510-93-R	Adapter, DC to 3.3 GHz, N(f) to 7/16 DIN(m), 50 Ω
1091-26-R	Adapter, DC to 18 GHz, N(m) to SMA(m), 50 Ω
1091-27-R	Adapter, DC to 18 GHz, N(m) to SMA(f), 50 Ω
1091-80-R	Adapter, DC to 18 GHz, N(f) to SMA(m), 50 Ω
1091-81-R	Adapter, DC to 18 GHz, N(f) to SMA(f), 50 Ω
34AN50	Precision Adapter, DC to 18 GHz, GPC-7 to N(m), 50 Ω
34ANF50	Precision Adapter, DC to 18 GHz, GPC-7 to N(f), 50 Ω
34NFK50	Precision Adapter, DC to 18 GHz, N(f) to K(m), 50 Ω
34NFKF50	Precision Adapter, DC to 18 GHz, N(m) to K(f), 50 Ω
34NK50	Precision Adapter, DC to 18 GHz, N(m) to K(m), 50 Ω
34NKF50	Precision Adapter, DC to 18 GHz, N(m) to K(f), 50 Ω
33NFN50B	Calibration Grade Adapter, DC to 18 GHz, N(f) to N(f), 50 Ω
33NFN50B	Calibration Grade Adapter, DC to 18 GHz, N(m) to N(f), 50 Ω
33NN50B	Calibration Grade Adapter, DC to 18 GHz, N(m) to N(m), 50 Ω

Notes:

Training at Anritsu

Anritsu has designed courses to help you stay up to date with technologies important to your job. For available training courses, visit: www.anritsu.com/training



• United States

Anritsu Americas Sales Company
450 Century Parkway, Suite 190
Allen, TX 75013, U.S.A.
Phone: +1-800-Anritsu (1-800-267-4878)

• Canada

Anritsu Electronics Ltd.
700 Silver Seven Road, Suite 120
Kanata, Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

• Brazil

Anritsu Eletronica Ltda.
Praça Amadeu Amaral, 27 - 1 Andar
01327-010 - Bela Vista - Sao Paulo - SP
Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

• Mexico

Anritsu Company, S.A. de C.V.
Blvd Miguel de Cervantes Saavedra #169 Piso 1,
Col. Granada
Mexico, Ciudad de Mexico, 11520, MEXICO
Phone: +52-55-4169-7104

• United Kingdom

Anritsu EMEA L td.
200 Capability Green
Luton, Bedfordshire, LU1 3LU, U.K.
Phone: +44-1582-433200
Fax: +44-1582-731303

• France

Anritsu S.A.
12 avenue du Québec, Bâtiment Iris 1- Silic 612,
91140 Villebon-sur-Yvette, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

• Germany

Anritsu GmbH
Nemetschek Haus, Konrad-Zuse-Platz 1
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

• Italy

Anritsu S.r.l.
Via Elio Vittorini 129, 00144 Roma, Italy
Phone: +39-6-509-9711
Fax: +39-6-502-2425

List Revision Date: 20181114

• Sweden

Anritsu AB
Isafjordsgatan 32C
164 40 Kista, Sweden
Phone: +46-8-534-707-00

• Finland

Anritsu AB
Teknobulevardi 3-5
FI-01530 Vantaa, Finland
Phone: +358-20-741-8100
Fax: +358-20-741-8111

• Denmark

Anritsu A/S
Torveporten 2
2500 Valby, Denmark
Phone: +45-7211-2200
Fax: +45-7211-2210

• Russia

Anritsu EMEA Ltd.
Representation Office in Russia
Tverskaya str. 16/2, bld. 1, 7th floor
Moscow 125009, Russia
Phone: +7-495-363-1694
Fax: +7-495-935-8962

• Spain

Anritsu EMEA Ltd.
Representation Office in Spain
Paseo de la Castellana, 141. Planta 5
Edificio Cuzco IV
28046 Madrid, Spain
Phone: +34-915-726-761
Fax: +34-915-726-621

• United Arab Emirates

Anritsu EMEA Ltd.
Dubai Liaison Office
902 Aurora Tower
P O Box: 500311- Dubai Internet City
Dubai, United Arab Emirates
Phone: +971-4-3758479
Fax: +971-4-4249036

• India

Anritsu India Private Limited
6th Floor, Indiqube ETA, No.38/4
Adjacent to EMC2, Doddanekundi, Outer Ring Road
Bengaluru 560048, India
Phone: +91-80-6728-1300
Fax: +91-80-6728-1301

• Singapore

Anritsu Pte. Ltd.
11 Chang Charn Road, #04-01, Shriro House
Singapore 159640
Phone: +65-6282-2400
Fax: +65-6282-2533

• P.R. China (Shanghai)

Anritsu (China) Co., Ltd.
Room 2701-2705, Tower A
New Caohejing International Business Center
No. 391 Gui Ping Road
Shanghai 200233, P.R. China
Phone: +86-21-6237-0898
Fax: +86-21-6237-0899

• P.R. China (Hong Kong)

Anritsu Company Ltd.
Unit 1006-7, 10/F,
Greenfield Tower, Concordia Plaza
No. 1 Science Museum Road
Tsim Sha Tsui East, Kowloon
Hong Kong, P.R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

• Japan

Anritsu Corporation
8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016
Japan
Phone: +81-46-296-6509
Fax: +81-46-225-8352

• South Korea

Anritsu Corporation, Ltd.
5FL, 235 Pangyoyeok-ro
Bundang-gu, Seongnam-si
Gyeonggi-do 13494, South Korea
Phone: +82-31-696-7750
Fax: +82-31-696-7751

• Australia

Anritsu Pty. Ltd.
Unit 20, 21-35 Ricketts Road
Mount Waverley, Victoria 3149, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

• Taiwan

Anritsu Company Inc.
7F, No. 316, Sec. 1, NeiHu Rd, Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817

Data subject to change without notice.
For the most recent specifications, visit: www.anritsu.com.

8 of 8

MA244xxA TDS, PN: 11410-01127, Rev. B

Copyright September 2019, Anritsu Company, USA. All Rights Reserved.

© Anritsu All trademarks are registered trademarks of their respective companies.
Anritsu utilizes recycled paper and environmentally conscious inks and toner.