

**Anritsu** envision : ensure

# Spectrum Master™

## High Performance Handheld Spectrum Analyzer

### MS2720T

9 kHz to 9 GHz, 13 GHz, 20 GHz, 32 GHz, 43 GHz



## Introduction

From Anritsu, the inventor of the handheld spectrum analyzer first introduced in 1999, we are proud to introduce our 7<sup>th</sup> generation Spectrum Master MS2720T. The MS2720T represents the highest performance handheld spectrum analyzers available in the world as Anritsu pushes the envelope closer to benchtop quality. This generation introduces a touch screen, full-band tracking generators to 20 GHz, and best-in-class performance for dynamic range, DANL, phase noise, and sweep speed.

## Spectrum and Interference Analyzer Highlights

- Measure: Occupied Bandwidth, Channel Power, ACPR, C/I, Field Strength, Spectral Emissions
- Measure Interference: Spectrogram, Signal Strength, RSSI
- Dynamic Range: > 106 dB in 1 Hz RBW
- DANL: -164 dBm in 1 Hz RBW
- Phase Noise: -112 dBc/Hz @ 10 kHz offset at 1 GHz
- Resolution Bandwidth (RBW): 1 Hz to 10 MHz
- PIM Hunting
- Full-band Tracking Generators: 9, 13, 20 GHz
- Full-band Preamplifiers standard
- Channel Scanner: scan up to 20 channels at once
- Burst Detect™ Sweep Mode: Sweep 1000x in 15 MHz span
- Coverage Mapping: plot RSSI on on-screen map
- Interference Mapping: on-screen mapping with triangulation
- Operation to +55 °C: full performance on AC or battery

## Capabilities and Functional Highlights

### Wireless Measurements

- GSM/GPRS/EDGE
- W-CDMA/HSPA+
- TD-SCDMA/HSPA+
- PIM Alert Application
- LTE/LTE-A FDD/TDD
- NB-IoT
- CDMA/EV-DO
- WiMAX Fixed/Mobile
- EMF Test
- Zero-span IF Output
- I/Q Waveform Capture
- Gated Sweep
- AM/FM/PM Demodulator
- High Accuracy Power Meter up to 26 GHz USB Sensors
- Three Hour Battery

Table of Contents

Definitions..... 3

Spectrum Analyzer ..... 4

High Accuracy Power Meter (Option 19) ..... 7

Tracking Generator (Options 809, 813, and 820) ..... 8

Interference Analyzer (Option 25)..... 8

Channel Scanner (Option 27)..... 9

Coverage Mapping (Option 431)..... 9

Electromagnetic Field Test (Option 444) ..... 9

GPS Receiver (Option 31) ..... 10

Gated Sweep (Option 90) ..... 10

Zero Span IF Output (Option 89)..... 10

I/Q Waveform Capture (Option 24)..... 10

Secure Data (Option 7) ..... 10

AM/FM/PM Signal Analyzer (Option 509)..... 11

GSM/GPRS/EDGE Signal Analyzer (Option 880) ..... 12

W-CDMA/HSPA+ Signal Analyzer (Option 881) ..... 13

TD-SCDMA/HSPA+ Signal Analyzer (Option 882) ..... 14

LTE/LTE-A FDD/TDD Signal Analyzers (Option 883 and 886)..... 15

NB-IoT Analyzer (Option 887) ..... 17

CDMA/EV-DO Signal Analyzer (Option 884)..... 18

WiMAX Fixed/Mobile Signal Analyzer (Option 885) ..... 20

General Specifications ..... 22

easyTest Tools™..... 23

easyMap Tools™..... 23

Master Software Tools ..... 23

Web Remote Control..... 24

Programmable Remote Control ..... 24

Ordering Information – Instrument Options ..... 25

Standard Accessories ..... 26

Power Sensors ..... 26

Manuals..... 26

Troubleshooting Guides..... 26

Optional Accessories..... 27

Definitions

|                        |   |
|------------------------|---|
| Specifications         | All specifications and characteristics apply to Revision 3 instruments under the following conditions, unless otherwise stated: <ul style="list-style-type: none"> <li>• After 5 minutes of warm-up time, where the instrument is left in the ON state.</li> <li>• Sweep Mode set to Performance.</li> <li>• When using the internal reference signal.</li> </ul> |
| Typical Specifications | Typical specifications are not tested and not warranted. They are generally representative of characteristic performance.   |
| Nominal                | Design parameters are not tested and not warranted.   |
| Calibration Cycle      | Recommended calibration cycle is 12 months.   |
| Time Base Error        | Input Frequency × Frequency Reference Error   |
|                        | All specifications subject to change without notice. For the most current data sheet, please visit the Anritsu web site: <a href="http://www.anritsu.com">www.anritsu.com</a>   |

 **Spectrum Analyzer**
**Measurements**

|                    |  |
|--------------------|--|
| Smart Measurements | Field Strength (dBm/m <sup>2</sup> , dBV/m, dBmV/m, dBμV/m, V/m, Watt/m <sup>2</sup> , dBW/m <sup>2</sup> , A/m, dBA/m, or Watt/cm <sup>2</sup> )<br>Occupied Bandwidth (measures 99 % to 1 % power channel of a signal, or N dB from center of signal)<br>Channel Power (measures the total power in a specified bandwidth)<br>ACPR (adjacent channel power ratio)<br>Emission Mask (recall limit lines as emission mask)<br>Spurious Emissions (measures up to 32 segments with independent setups and limits)<br>C/I (carrier-to-interference ratio)<br>AM/FM/SSB Demodulation (AM, wide/narrow FM, upper/lower SSB), (audio only)<br>PIM Alert Application (available for download)<br>PIM Hunting |
|--------------------|--|

**Setup Parameters**

|           |   |
|-----------|---|
| Frequency | Center/Start/Stop, Span, Freq Step, Freq Offset, Signal Standard, Channel #, Channel Increment  |
| Amplitude | Reference Level (RL), Scale, Attenuation Auto/Level, RL Offset, Units (dBm, dBV, dBmV, dBμV, Volt, Watt, dBW, A, dBA), Pre-Amp On/Off, Detection (Peak, RMS/Avg, Negative Peak, Sample, Quasi-Peak) |
| Span      | Span, Span Up/Down (1-2-5), Full Span, Zero Span, Last Span   |
| Bandwidth | RBW, Auto RBW, VBW, Auto VBW, VBW/Avg Type (Linear, Log), RBW/VBW Ratio, Span/RBW Ratio   |
| Impedance | 50 Ω, 75 Ω; external pad required for 75 Ω operation  |

**Sweep Functions**

|                    |  |
|--------------------|--|
| Sweep              | Single/Continuous, Sweep Time, Gated Sweep (see Option 0090)   |
| Sweep Mode         | Fast (up to 100x faster than Performance), Performance, No FFT, Burst Detect (1000x Fast in 15 MHz span) |
| Triggers           | Free Run, External, Video, IF Power, Force Trigger Once  |
| Trigger Parameters | Delay, Level, Slope, Hysteresis, Holdoff (availability varies with trigger)                              |

**Trace Functions**

|                    |  |
|--------------------|--|
| Traces             | Up to three Traces (A, B, C), View/Blank, Write/Hold, Trace A/B/C Operations             |
| Trace A Operations | Normal, Max Hold, Min Hold, Average, # of Averages, (always the live trace)              |
| Trace B Operations | A → B, B ← → C, Max Hold, Min Hold   |
| Trace C Operations | A → C, B ← → C, Max Hold, Min Hold, A - B → C, B - A → C, Relative Reference (dB), Scale |

**Marker Functions**

|                      |   |
|----------------------|---|
| Markers              | Markers 1-6 each with a Delta Marker, or Marker 1 Reference with Six Delta Markers, Marker Table (On/Off/Large), All Markers Off                          |
| Marker Types         | Style (Fixed/Tracking), Noise Marker, Frequency Counter Marker  |
| Marker Auto-Position | Peak Search, Next Peak (Right/Left), Peak Threshold %, Set Marker to Channel, Marker Frequency to Center, Delta Marker to Span, Marker to Reference Level |
| Marker Table         | 1-6 markers frequency and amplitude, plus delta markers frequency offset and amplitude  |

**Limit Line Functions**

|                     |  |
|---------------------|--|
| Available Spans     | > 0 Hz   |
| Limit Lines         | Upper/Lower, On/Off, Edit, Move, Envelope, Advanced, Limit Alarm, Default Limit        |
| Limit Line Edit     | Frequency, Amplitude, Add Point, Add Vertical, Delete Point, Next Point Left/Right     |
| Limit Line Move     | To Current Center Frequency, By dB or Hz, To Marker 1, Offset from Marker 1            |
| Limit Line Envelope | Create Envelope, Update Amplitude, Number of Points (2-41), Offset, Shape Square/Slope |
| Limit Line Advanced | Type (Absolute/Relative), Mirror, Save/Recall  |
| Save on Event       | When Limit Crossed   |

**Frequency**

|   |   |                 |                 |                 |                 |
|---|---|-----------------|-----------------|-----------------|-----------------|
| Frequency Range                           | MS2720T-0709  | MS2720T-0713    | MS2720T-0720    | MS2720T-0732    | MS2720T-0743    |
| (usable to 0 Hz)                          | 9 kHz to 9 GHz  | 9 kHz to 13 GHz | 9 kHz to 20 GHz | 9 kHz to 32 GHz | 9 kHz to 43 GHz |
| Tuning Resolution                         | 1 Hz  |                 |                 |                 |                 |
| Frequency Reference                       | Aging: ± 0.1 × 10 <sup>-6</sup> per year; ± 1.0 × 10 <sup>-6</sup> per 10 years<br>Accuracy: ± 0.3 × 10 <sup>-6</sup> (25 °C ± 25 °C) plus aging<br>(see Option 31 for improved frequency reference accuracy) |                 |                 |                 |                 |
| Auto-Sensing External Frequency Reference | 1, 1.2288, 1.544, 2.048, 2.4576, 4.8, 4.9152, 5, 9.8304, 10, 13, 19.6608 (MHz)  |                 |                 |                 |                 |
| Sweep Time                                | 7 μs to 3600 s in zero span   |                 |                 |                 |                 |
| Sweep Time Accuracy                       | ± 2 % in zero span  |                 |                 |                 |                 |

**Bandwidth**

|                               |   |
|-------------------------------|---|
| Resolution Bandwidth (RBW)    | 1 Hz to 10 MHz in 1-3 sequence ± 10 % (-3 dB bandwidth) |
| Video Bandwidth (VBW)         | 1 Hz to 10 MHz in 1-3 sequence (-3 dB bandwidth)        |
| RBW with Quasi-Peak Detection | 200 Hz, 9 kHz, 120 kHz (-6 dB bandwidth)                |
| VBW with Quasi-Peak Detection | Auto VBW is On, RBW/VBW = 1                             |
| VBW/Average Type              | Linear/Log  |

 **Spectrum Analyzer** (Continued)

**Spectral Purity – SSB Phase Noise**

| Offset from 1 GHz   | 9 GHz Instrument |             | 13 GHz to 43 GHz Instruments |             |
|---------------------|------------------|-------------|------------------------------|-------------|
|                     | Maximum          | Typical     | Maximum                      | Typical     |
| 10 kHz              | -108 dBc/Hz      | -112 dBc/Hz | -102 dBc/Hz                  | -106 dBc/Hz |
| 100 kHz             | -110 dBc/Hz      | -115 dBc/Hz | -106 dBc/Hz                  | -110 dBc/Hz |
| 1 MHz               | -118 dBc/Hz      | -123 dBc/Hz | -111 dBc/Hz                  | -116 dBc/Hz |
| 10 MHz              | -129 dBc/Hz      | -133 dBc/Hz | -123 dBc/Hz                  | -129 dBc/Hz |
| Offset from 300 MHz |                  |             |                              |             |
| 1 kHz               | -107 dBc/Hz      | -111 dBc/Hz |                              |             |
| 10 kHz              | -112 dBc/Hz      | -114 dBc/Hz |                              |             |
| 62.5 kHz            | -113 dBc/Hz      | -115 dBc/Hz |                              |             |
| 100 kHz             | -114 dBc/Hz      | -117 dBc/Hz |                              |             |
| 1 MHz               | -120 dBc/Hz      | -122 dBc/Hz |                              |             |
| 10 MHz              | -128 dBc/Hz      | -131 dBc/Hz |                              |             |

**Amplitude Ranges**

|                          |   |
|--------------------------|---|
| Dynamic Range            | >106 dB minimum at 2.4 GHz, 2/3 (TOI-DANL) in 1 Hz RBW  |
| Measurement Range        | DANL to +30 dBm   |
| Display Range            | 1 to 15 dB/div in 1 dB steps, ten divisions displayed   |
| Reference Level Range    | -150 dBm to +30 dBm   |
| Attenuator Resolution    | 0 to 65 dB, 5.0 dB steps  |
| Reference Level Offset   | 99.9 dB External Loss to 99.9 dB External Gain  |
| Amplitude Units          | Log Scale Modes: dBW, dBm, dBμW, dBV, dBmV, dBμV, dBA, dBmA, dBμA<br>Linear Scale Modes: fV, nV, μV, mV, V, fW, pW, nW, μW, mW, W, pA, nA, μA, mA, A  |
| Maximum Continuous Input | +30 dBm Peak typical, ± 50 VDC (≥ 10 dB Attenuation)<br>+23 dBm Peak typical, ± 50 VDC (< 10 dB Attenuation)<br>+13 dBm Peak typical, ± 50 VDC (Preamp = ON Option 713, 720, 732, 743; no extra limit for Option 709) |

**Amplitude Accuracy** (excluding effects of VSWR, noise, and spurs)

|                               | 20 °C to 30 °C<br>(after 30 minute warm-up) |          | -10 °C to 55 °C<br>(after 60 minute warm-up) |          |
|-------------------------------|---|----------|--|----------|
|                               | Maximum                                     | Typical  | Maximum                                      | Typical  |
| 9 GHz Instrument              |   |          |  |          |
| 9 kHz to 100 kHz <sup>a</sup> | ± 2.3 dB                                    | ± 0.5 dB | ± 2.3 dB                                     | ± 0.5 dB |
| 100 kHz to 7 GHz              | ± 1.3 dB                                    | ± 0.5 dB | ± 2.3 dB                                     | ± 0.5 dB |
| > 7 GHz to 9 GHz              | ± 1.8 dB                                    | ± 0.5 dB | ± 2.8 dB                                     | ± 0.5 dB |
| 13/20 GHz Instruments         |   |          |  |          |
| 100 kHz to 13 GHz             | ± 1.3 dB                                    | ± 0.5 dB | ± 2.3 dB                                     | ± 0.5 dB |
| > 13 GHz to 18 GHz            | ± 2.3 dB                                    | ± 0.5 dB | ± 3.3 dB                                     | ± 0.5 dB |
| > 18 GHz to 20 GHz            | -   | ± 1.0 dB | -  | ± 1.0 dB |
| 32/43 GHz Instruments         |   |          |  |          |
| > 100 kHz to 13 GHz           | ± 1.3 dB                                    | ± 0.5 dB | ± 2.3 dB                                     | ± 0.5 dB |
| > 13 GHz to 40 GHz            | ± 2.3 dB                                    | ± 0.5 dB | ± 3.3 dB                                     | ± 0.5 dB |
| > 40 GHz to 43 GHz            | -   | ± 1.0 dB | -  | ± 1.0 dB |

a. Values below 100 kHz are with the preamplifier turned off.

**Displayed Average Noise Level (DANL)** (RMS detection, VBW/Avg type = Log, Ref Level = -20 dBm for Preamp Off and -50 dBm for Preamp On, Auto Attenuator On, Performance Sweep Mode)

|                          | Preamp = Off |          | Preamp = On |          |
|--------------------------|--------------|----------|-------------|----------|
|                          | Maximum      | Typical  | Maximum     | Typical  |
| 9 GHz Instrument         |              |          |             |          |
| 10 MHz to 3 GHz          | -146 dBm     | -149 dBm | -160 dBm    | -163 dBm |
| > 3 GHz to 8 GHz         | -140 dBm     | -143 dBm | -152 dBm    | -155 dBm |
| > 8 GHz to 9 GHz         | -            | -138 dBm | -           | -155 dBm |
| 13 to 43 GHz Instruments |              |          |             |          |
| 10 MHz to 4 GHz          | -145 dBm     | -148 dBm | -161 dBm    | -164 dBm |
| > 4 GHz to 9 GHz         | -142 dBm     | -145 dBm | -159 dBm    | -162 dBm |
| > 9 GHz to 13 GHz        | -136 dBm     | -139 dBm | -156 dBm    | -159 dBm |
| 20 GHz Instrument        |              |          |             |          |
| > 13 GHz to 20 GHz       | -136 dBm     | -142 dBm | -155 dBm    | -161 dBm |
| 32 to 43 GHz Instruments |              |          |             |          |
| > 13 GHz to 20 GHz       | -134 dBm     | -141 dBm | -152 dBm    | -158 dBm |
| > 20 GHz to 32 GHz       | -135 dBm     | -140 dBm | -154 dBm    | -159 dBm |
| > 32 GHz to 40 GHz       | -127 dBm     | -130 dBm | -148 dBm    | -151 dBm |
| > 40 GHz to 43 GHz       | -            | -130 dBm | -           | -151 dBm |


**Spectrum Analyzer** (Continued)

**Spurs** (0 dB input attenuation)

 Residual Spurs (RF input terminated)  
 < 13 GHz  
 13 to 20 GHz  
 > 20 to 32 GHz  
 > 32 to 43 GHz

**Preamp = Off**

 -90 dBm, maximum  
 -85 dBm, maximum  
 -80 dBm, maximum  
 -80 dBm, maximum

**Preamp = On**

 -100 dBm, maximum  
 -100 dBm, maximum  
 -100 dBm, maximum  
 -95 dBm, maximum

**Maximum<sup>a</sup>**

-60 dBc

**Typical**

-70 dBc

Input-Related Spurious (-30 dBm input)

a. Instrument centered on single signal, span &lt; 1.7 GHz

**Third-Order Intercept (TOI)** (-20 dBm tones 100 kHz apart, 0 dB Attenuation Preamp OFF, Reference Level -20 dBm)

 2.4 GHz +14 dBm minimum  
 50 MHz to 20 GHz +20 dBm typical  
 > 20 GHz to 32 GHz +15 dBm typical  
 > 32 GHz to 43 GHz +20 dBm typical

**P1dB**

 < 4 GHz +5 dBm nominal  
 4 GHz to 20 GHz +12 dBm nominal  
 > 20 GHz to 32 GHz +7 dBm nominal  
 > 32 GHz to 43 GHz +12 dBm nominal

**Second Harmonic Distortion** (0 dB input attenuation, -30 dBm input)

 50 MHz -54 dBc maximum  
 < 4 GHz -60 dBc typical  
 > 4 GHz -75 dBc typical

**VSWR** ( $\geq 10$  dB input attenuation)


 9 GHz Instruments  
 < 4 GHz 1.5:1 typical  
 4 GHz to 8 GHz 1.8:1 typical  
 13 GHz to 43 GHz Instruments  
 < 20 GHz 1.5:1 typical  
 20 GHz to 43 GHz 2.0:1 typical



**High Accuracy Power Meter (Option 19)** (requires external USB Power Sensor)

|  |  |                                       |  |   |   |
|--|--|---------------------------------------|--|---|---|
| Amplitude                                | Maximum, Minimum, Offset, Relative On/Off, Units, Auto Scale |                                       |  |   |   |
| Average                                  | # of Running Averages, Max Hold                              |                                       |  |   |   |
| Zero/Cal                                 | Zero On/Off, Cal Factor (Center Frequency, Signal Standard)  |                                       |  |   |   |
| Limits                                   | Limit On/Off, Limit Upper/Lower                              |                                       |  |   |   |
| Power Sensor Model                       | MA24105A   | MA24106A                              | MA24108A/18A/26A                                       | MA24208A/18A                              | MA24330A/40A/50A  |
| Description                              | Inline High Power Sensor                                     | High Accuracy RF Power Sensor         | Microwave USB Power Sensor                             | Microwave Universal USB Power Sensor      | Microwave CW USB Power Sensor                           |
| Frequency Range                          | 350 MHz to 4 GHz   | 50 MHz to 6 GHz                       | 10 MHz to 8/18/26 GHz                                  | 10 MHz to 8/18 GHz                        | 10 MHz to 33/40/50 GHz                                  |
| Connector                                | Type N(f), 50 Ω  | Type N(m), 50 Ω                       | Type N(m), 50 Ω (8/18 GHz)<br>Type K(m), 50 Ω (26 GHz) | Type N(m), 50 Ω                           | Type K(m), 50 Ω (33/40 GHz)<br>Type V(m), 50 Ω (50 GHz) |
| Dynamic Range                            | +3 dBm to +51.76 dBm (2 mW to 150 W)                         | -40 dBm to +23 dBm (0.1 μW to 200 mW) | -40 dBm to +20 dBm (0.1 μW to 100 mW)                  | -60 dBm to +20 dBm (1 nW to 100 mW)       | -70 dBm to +20 dBm (0.1 nW to 100 mW)                   |
| Measurand                                | True-RMS   | True-RMS                              | True-RMS, Slot Power, Burst Average Power              | True-RMS, Slot Power, Burst Average Power | Average Power   |
| Measurement Uncertainty                  | ± 0.17 dB <sup>a</sup>                                       | ± 0.16 dB <sup>b</sup>                | ± 0.18 dB <sup>c</sup>                                 | ± 0.17 dB <sup>d</sup>                    | ± 0.17 dB <sup>e</sup>                                  |
| Data sheet (for complete specifications) | 11410-00621  | 11410-00424                           | 11410-00504  | 11410-00841                               | 11410-00906   |

- Notes:
- a. Expanded uncertainty with K=2 for power measurements of a CW signal greater than +20 dBm with a matched load. Measurement results referenced to the input side of the sensor.
  - b. Total RSS measurement uncertainty (0 °C to 50 °C) for power measurements of a CW signal greater than -20 dBm with zero mismatch errors.
  - c. Expanded uncertainty with K=2 for power measurements of a CW signal greater than -20 dBm with zero mismatch errors.
  - d. Power uncertainty expressed with two sigma confidence level for CW measurement after zero operation. Includes calibration factor and linearity over temperature uncertainties, but not the effects of mismatch, zero set and drift, or noise.
  - e. Includes linearity over temperature uncertainties, but not the effects of calibration factor, mismatch, zero set and drift, and noise.

 **Tracking Generator (Options 809, 813, and 820)**
**Setup Parameters**

|                                   |  |
|-----------------------------------|--|
| Frequency                         | Center/Start/Stop, Span, Frequency Step, Frequency Offset, Signal Standard, Channel #, Channel Increment |
| Amplitude                         | Reference Level (RL), Scale, Attenuation Auto/Level, RL Offset, Units, Pre-Amp, Detection                |
| Span                              | Span, Span Up/Down (1-2-5), Full Span, Zero Span, Last Span  |
| Bandwidth                         | RBW, Auto RBW, VBW, Auto VBW, VBW/Average Type (Linear/Log), RBW/VBW Ratio, Span/RBW Ratio               |
| Generator                         | On/Off, Output Power, Mode (CW/Tracking), Settings, Transmission Measurement                             |
| Tracking Generator Settings       | External Gain/Loss, Power Statistics (On/Off)  |
| Transmission Measurement Settings | Normalize (Off/On), Scale, Reference Position and Amplitude, Transmission Statistics and Offset          |
| Maximum Continuous Input          | +23 dBm, ± 50 VDC  |

**Frequency**

|                    |  |
|--------------------|--|
| Frequency Range    | Frequency Range  |
| MS2720T-0809       | 100 kHz to 9 GHz   |
| MS2720T-0813       | 100 kHz to 13 GHz  |
| MS2720T-0820       | 100 kHz to 20 GHz  |
| Frequency Accuracy | Aging: ± 0.1 × 10 <sup>-6</sup> per year; ± 1.0 × 10 <sup>-6</sup> per 10 years<br>Accuracy: ± 0.3 × 10 <sup>-6</sup> (25 °C ± 25 °C) plus aging |

**Output Power**

|                               |  |
|-------------------------------|--|
| 100 kHz to 20 GHz             | -40 dBm to 0 dBm   |
| Step Size                     | 0.1 dB nominal   |
| Dynamic Range                 |  |
| 9 GHz Instrument              | > 110 dB typical 100 kHz to 7 GHz<br>> 100 dB typical > 7 GHz to 9 GHz   |
| 13 GHz and 20 GHz Instruments | > 100 dB typical 100 kHz to 12 GHz<br>> 80 dB typical > 12 GHz to 20 GHz |

**Level Accuracy** (At least 30 minute warm-up after 1 hour non-operating at 15 to 35 °C ambient, excludes load VSWR effects)

| Frequency Range    | 20 °C to 30 °C<br>(after 30 minute warm-up) |          | 0 °C to 50 °C<br>(after 60 minute warm-up) |          |
|--------------------|---|----------|--|----------|
|                    | Maximum                                     | Typical  | Maximum                                    | Typical  |
| 100 kHz to 9 GHz   | ± 1.5 dB                                    | ± 0.5 dB | ± 2.0 dB                                   | ± 1.0 dB |
| > 9 GHz to 13 GHz  | ± 1.6 dB                                    | ± 1.0 dB | ± 2.1 dB                                   | ± 1.5 dB |
| > 13 GHz to 18 GHz | ± 2.0 dB                                    | ± 1.0 dB | ± 2.5 dB                                   | ± 1.5 dB |

**VSWR**

|                   |             |
|-------------------|-------------|
| 100 kHz to 5 GHz  | 2:1 typical |
| > 5 GHz to 20 GHz | 4:1 typical |

 **Interference Analyzer (Option 25)**
**Measurements**

|   |   |
|---|---|
| Spectrum                                  | Field Strength<br>Occupied Bandwidth<br>Channel Power<br>Adjacent Channel Power (ACPR)<br>AM/FM/SSB Demodulation (Wide/Narrow FM, Upper/Lower SSB), (audio out only)<br>Carrier-to-Interference ratio (C/I) |
| Spectrogram                               | Collect data up to 72 hours   |
| Signal Strength                           | Gives visual and aural indication of signal strength  |
| Received Signal Strength Indicator (RSSI) | Collect data up to 168 hours (one week)   |
| Interference Mapping                      | Draw multiple bearings of signal strength from GPS location on on-screen map<br>Pan and Zoom on-screen maps<br>Support for Anritsu MA2700A Handheld Interference Hunter                                     |
| Impedance                                 | 50 Ω, 75 Ω; external pad required for 75 Ω operation  |



 **Channel Scanner (Option 27)**

**General**

|                    |  |
|--------------------|--|
| Number of Channels | 1 to 20 Channels (Power Levels)  |
| Measurements       | Graph/Table, Max Hold (On/5 s/Off), Frequency/Channel, Current/Maximum, Dual Color |
| Scanner            | Scan Channels, Scan Frequencies, Scan Custom List, Scan Script Master™             |
| Amplitude          | Reference Level, Scale   |
| Custom Scan        | Number of Channels, Signal Standard & Channel, Frequency, Bandwidth                |
| Frequency Range    | 9 kHz to 9, 13, 20, 32, or 43 GHz  |
| Frequency Accuracy | ± 10 Hz + time base error  |
| Measurement Range  | -110 dBm to +30 dBm  |
| Impedance          | 50 Ω, 75 Ω; external pad required for 75 Ω operation                               |

 **Coverage Mapping (Option 431)**

**Measurements**

|                 |            |
|-----------------|------------|
| Indoor Mapping  | RSSI, ACPR |
| Outdoor Mapping | RSSI, ACPR |

**Setup Parameters**

|                              |  |
|------------------------------|--|
| Mode                         | Spectrum Analyzer  |
| Frequency                    | Center, Span (ACPR only), Freq Step, Signal Standard, Channel #, Channel Increment   |
| Amplitude                    | Reference Level (RL), Attenuation Auto/Level, RL Offset, Pre-Amp On/Off, Detection   |
| Span                         | RSSI Mode: Zero Span<br>ACPR Mode: Span, Span Up/Down (1-2-5), Full Span, Last Span  |
| BW                           | RBW, Auto RBW, VBW, Auto VBW, RBW/VBW Ratio, Span/RBW Ratio  |
| Measurement Setup            | RSSI: Mapping color thresholds<br>ACPR: Main Ch BW, Adj Ch BW, Ch Spacing, Adjacent Ch dB Offset, Thresholds for Good and Poor main channel levels                               |
| Mapping Colors               | RSSI: Dark Green (Excellent), Light Green (Very Good), Yellow (Good), Orange (Fair), Dark Red (Poor)<br>ACPR: Dark Green (Good), Yellow (between Good and Poor), Dark Red (Poor) |
| Point Distance or Time Setup | Repeat Type: Time (100 ms to 16 s), Distance (1 m to 10,000 m)<br>Distance Units: m, ft  |
| Save Points Map              | Save KML, JPEG, Tab Delimited  |
| Recall Points Map            | Recall Map, Recall KML Points only, Recall KML Points with Map, Recall Default Grid  |
| Map Types                    | Outdoor (GPS embedded), Indoor (non-GPS embedded). Import maps using the Anritsu easyMap Tools. Zoomable (.azm) maps are usable, but cannot be zoomed.                           |

 **Electromagnetic Field Test (Option 444)**

**Measurements**

|                     |  |
|---------------------|--|
| Setup               | Limit lines, axis dwell time, measurement time, auto-logging, measurement units, trace display   |
| Spectrum Analyzer   | Field strength is measured   |
| LTE OTA, TD-LTE OTA | P-SS, S-SS, and RS are measured and displayed based on each Cell ID received   |
| W-CDMA OTA          | P-CPICH signals are measured and displayed for each Scrambling Code measured   |
| Units               | Spectrum Analyzer: dBm/m <sup>2</sup> , dBV/m, dBmV/m, dBuV/m, V/m, W/m <sup>2</sup> , dBW/m <sup>2</sup> , A/m, dBA/m, W/cm <sup>2</sup><br>LTE OTA, TD-LTE OTA, W-CDMA OTA: dBm/m <sup>2</sup> , V/m, W/m <sup>2</sup> |
| Results             | Maximum, minimum, and average of all measurements conducted  |
| Display             | Measurement status, number of measurements taken, pass/fail indicators   |


**Frequency Range**

**Supported Antenna**

|             |                  |
|-------------|------------------|
| 2000-1800-R | 9 kHz to 300 MHz |
| 2000-1792-R | 30 MHz to 3 GHz  |
| 2000-1791-R | 700 MHz to 6 GHz |

**Modes where EMF Measurements available**

|  |
|--|
| Spectrum Analyzer                        |
| LTE (both FDD and TDD Modes, Option 883) |
| W-CDMA (Option 881)                      |

 **GPS Receiver (Option 31)** (requires external GPS antenna, sold separately)

|                             |   |
|-----------------------------|---|
| Setup                       | On/Off, Antenna Voltage 3.3 V/5.0 V, GPS Info   |
| GPS Time/Location Indicator | UTC Time, Latitude, Longitude, and Altitude on display (UTC Time and Altitude on GPS Info display)<br>UTC Time, Latitude, Longitude, and Altitude with trace storage  |
| High Frequency Accuracy     | < $\pm 2.5 \times 10^{-8}$ with GPS On, 3 minutes after satellite lock in selected mode (GPS Antenna connected)<br>< $\pm 5.0 \times 10^{-8}$ for 3 days after GPS lock, 0 °C to 50 °C ambient temperature (GPS Antenna disconnected) |
| Connector                   | SMA, female   |

 **Gated Sweep (Option 90)**

|                  |  |
|------------------|--|
| Mode             | Spectrum Analyzer, Sweep   |
| Trigger          | External TTL, IF Level   |
| IF Trigger Level | -80 dBm to +25 dBm typical   |
| Setup            | Gated Sweep (On/Off)<br>Gate Polarity (Rising, Falling)<br>Gate Delay (0 ms to 10 ms typical)<br>Gate Length (1 $\mu$ s to 65 ms typical)<br>Gate View Settings: Zero Span Time , Zero Span RBW, Zero Span VBW |

 **Zero Span IF Output (Option 89)**

|                  |   |
|------------------|---|
| Mode             | Spectrum Analyzer/Span/Zero Span  |
| Center Frequency | 140 MHz nominal (varies up to $\pm 10$ kHz nominal with center frequency and IF bandwidth)              |
| Output Level     | -25 dBm typical, for signals at below reference levels, with Auto Attenuation. Maximum -10 dBm typical. |
| Reference Level  | -57 dBm to +30 dBm (Preamp Off)<br>-87 dBm to -40 dBm (Preamp On)                                       |
| IF Bandwidths    | Up to 30 MHz (3 dB bandwidth)   |
| Connector        | BNC female  |

 **I/Q Waveform Capture (Option 24)**

|                          |  |
|--------------------------|--|
| Mode                     | Spectrum Analyzer                          |
| Capture Mode             | Single or Continuous                       |
| Trigger                  | Free Run, External (Rising/Falling), Delay |
| Maximum Capture Length   | 800 ms                                     |
| Maximum Sample Rate      | 40 MHz                                     |
| Maximum Signal Bandwidth | 32 MHz                                     |

 **Secure Data (Option 7)**

|                |  |
|----------------|--|
| Set at Factory | Save measurement files on external USB flash drive only<br>Internal memory is permanently disabled |
|----------------|--|

 **AM/FM/PM Signal Analyzer (Option 509)**

**Measurements**

| Display Type       | RF Spectrum (AM/FM/PM)                            | Audio Spectrum (AM)   | Audio Spectrum (FM/PM)   | Audio Waveform (AM)   | Audio Waveform (FM/PM)   | Summary (AM)  | Summary (FM/PM)  |
|--------------------|---|---|--|---|--|---|--|
| Graphic Display    | Power (dBm)<br>vs.<br>Frequency                   | Depth (%)<br>vs.<br>Modulation Frequency  | Deviation (kHz/rad)<br>vs.<br>Modulation Frequency   | Depth (%)<br>vs.<br>Time  | Deviation (kHz/rad)<br>vs.<br>Time   | None  | None   |
| Numerical Displays | Carrier Power<br>Carrier Frequency<br>Occupied BW | AM Rate<br>RMS Depth<br>(Pk-Pk)/2 Depth<br>SINAD*<br>THD*<br>Distortion/Total Vrms* | FM/PM Rate<br>RMS Deviation<br>(Pk-Pk)/2 Deviation<br>SINAD*<br>THD*<br>Distortion/Total Vrms* | AM Rate<br>RMS Depth<br>(Pk-Pk)/2 Depth<br>SINAD*<br>THD*<br>Distortion/Total Vrms* | FM/PM Rate<br>RMS Deviation<br>(Pk-Pk)/2 Deviation<br>SINAD*<br>THD*<br>Distortion/Total Vrms* | RMS Depth<br>Peak + Depth<br>Peak - Depth<br>(Pk-Pk)/2 Depth<br>Carrier Power<br>Carrier Frequency<br>Occupied Bandwidth<br>AM Rate<br>SINAD*<br>THD*<br>Distortion/Total Vrms* | RMS Deviation<br>Peak + Deviation<br>Peak - Deviation<br>(Pk-Pk)/2 Deviation<br>Carrier Power<br>Carrier Frequency<br>Occupied Bandwidth<br>FM/PM Rate<br>SINAD*<br>THD*<br>Distortion/Total Vrms* |

\* Requires sine wave modulation

**Setup Parameters**

|                   |   |
|-------------------|---|
| Frequency         | Center Freq, Span, Freq Step, Signal Standard, Channel, Channel Increment, Set (measured) Carrier Freq to Center  |
| Amplitude Setup   | Scale, Power Offset, Adjust Range   |
| Measurements      | RF Spectrum, Audio Spectrum (demodulated), Audio Waveform (demodulated), Summary, Coverage Mapping (Option 431 required), Audio Demod (AM/FM only)  |
| Measurement Setup | All Measurements: Demod Type (AM, FM, PM), IFBW, Auto IFBW, Squelch Units, Distortion Measurements (Sinewave or Broadcast)<br>RF Spectrum: OBW Method, OBW %, OBW dBC<br>Audio Spectrum: Span, Scale, Squelch Power<br>Audio Waveform: Sweep Time, Scale, Squelch Power<br>Summary: Average count, Squelch Power<br>Coverage Mapping: Measurement (SINAD, Carrier Power, Multiple), Thresholds, Point Distance/Time<br>Audio Demod: Demod Type (AM, USB, LSB, Widband FM, Narrowband FM), Volume, Squelch |
| Mapping Colors    | Dark Green (Excellent), Light Green (Very Good), Orange (Good), Yellow (Fair), Dark Red (Poor)  |
| Marker            | Six markers with Delta for each, Peak Search, Marker Freq to Center, Marker to Ref Lvl, Marker Table  |

**RF and Modulation Measurements**

|                |   |
|----------------|---|
| AM             | Modulation Rate: $\pm 1$ Hz (< 100 Hz), $\pm 2$ % (> 100 Hz)<br>Depth: $\pm 5$ % for (Modulation rates 10 Hz to 100 kHz)                              |
| FM             | Modulation Rate: $\pm 1$ Hz (< 100 Hz); $\pm 2$ % (100 Hz to 100 kHz)<br>Deviation Accuracy: $\pm 5$ % (100 Hz to 100 kHz)**                          |
| PM             | Modulation Rate: $\pm 1$ Hz (< 100 Hz); $\pm 2$ % (100 Hz to 100 kHz)<br>Deviation Accuracy: $\pm 5$ % (deviation 0 to 93 Rad, rate 10 Hz to 5 kHz)** |
| IF Bandwidth   | 1 kHz to 300 kHz in 1-3 sequence  |
| Frequency Span | RF Spectrum: 10 kHz to 10 MHz<br>Audio Spectrum: 2 kHz, 5 kHz, 10 kHz, 20 kHz, 70 kHz, 140 kHz  |
| RBW/VBW        | 30  |
| Span/RBW       | 100   |
| Sweep Time     | 50 $\mu$ s to 50 ms (Audio Waveform)  |
| **             | IFBW must be greater than 95 % occupied BW  |

 **GSM/GPRS/EDGE Signal Analyzer (Option 880)**
**Measurements**

| RF  | Demodulation  | Over-the-Air (OTA)   | Pass/Fail   |
|---|---|--|---|
| Channel Spectrum<br>Channel Power<br>Occupied Bandwidth<br>Burst Power<br>Average Burst Power<br>Frequency Error<br>Modulation Type<br>BSIC (NCC, BCC)                                      | Phase Error<br>EVM<br>Origin Offset<br>C/I<br>Modulation Type<br>Magnitude Error<br>BSIC (NCC, BCC) | There are no additional OTA Measurements<br>RF and Demodulation Measurements can be made OTA | View Pass/Fail Limits<br>GSM, EDGE<br>Available Measurements<br>Channel Power<br>Occupied Bandwidth<br>Burst Power<br>Average Burst power<br>Frequency Error<br>Phase Error<br>EVM<br>Origin Offset<br>C/I<br>Magnitude Error<br>Script Master™ |
| Multi-channel Spectrum<br>Power vs. Time (Frame/Slot)<br>Channel Power<br>Occupied Bandwidth<br>Burst Power<br>Average Burst Power<br>Frequency Error<br>Modulation Type<br>BSIC (NCC, BCC) |   |  |   |

**Setup Parameters**

|                            |  |
|----------------------------|--|
| GSM/EDGE Select            | Auto, GSM, EDGE  |
| Frequency                  | Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel |
| Amplitude                  | Power Offset, Auto Range, Adjust Range   |
| Sweep                      | Single/Continuous, Trigger Sweep   |
| Save/Recall                | Setup, Measurement, Screen Shots (JPEG - save only), to Internal/External Memory |
| Measurement Summary Screen | Overall Measurements   |

**RF Measurements**

|                    |   |
|--------------------|---|
| Frequency Error    | ± 10 Hz + time base error, 99 % confidence level                              |
| Occupied Bandwidth | Bandwidth within which lies 99 % of the power transmitted on a single channel |
| Burst Power Error  | ± 1.5 dB, ± 1 dB typical, (-50 dBm to +20 dBm)                                |

**Demodulation Measurements**

|                                     |         |
|-------------------------------------|---------|
| GMSK Modulation Quality (RMS Phase) |         |
| Measurement Accuracy                | ± 1 °   |
| Residual Error (GSMK)               | 1 °     |
| 8 PSK Modulation Quality (EVM)      |         |
| Measurement Accuracy                | ± 1.5 % |
| Residual Error (8 PSK)              | 2.5 %   |

 **W-CDMA/HSPA+ Signal Analyzer (Option 881)**

**Measurements**

| RF   | Demodulation   | Over-the-Air (OTA)  | Pass/Fail  |
|--|--|---|--|
| Band Spectrum<br>Channel Spectrum<br>Channel Power<br>Occupied Bandwidth<br>Peak-to-Average Power<br>Spectral Emission Mask<br>Single carrier ACLR<br>Multi-carrier ACLR<br>RF Summary | Code Domain Power Graph<br>P-CPICH Power<br>Channel Power<br>Noise Floor<br>EVM<br>Carrier Feed Through<br>Peak Code Domain Error<br>Carrier Frequency<br>Frequency Error<br>Control Channel Power<br>Abs/Rel/Delta Power<br>CPICH, P-CCPCH<br>S-CCPCH, PICH<br>P-SCH, S-SCH<br>HSPA+<br>Power vs. Time<br>Constellation<br>Code Domain Power Table<br>Code, Status<br>EVM, Modulation Type<br>Power, Code Utilization<br>Power Amplifier Capacity<br>Codogram<br>Modulation Summary | Scrambling Code Scanner (Six)<br>Scrambling Codes<br>CPICH<br>$E_c/I_0$<br>$E_c$<br>Pilot Dominance<br>OTA Total Power<br>Multipath Scanner (Six)<br>Six Multipaths<br>Tau<br>Distance<br>RSCP<br>Relative Power<br>Multipath Power | View Pass/Fail Limits<br>All, RF, Demod<br>Available Measurements<br>Max Output Power<br>Frequency Error<br>EVM<br>CPICH<br>Occupied Bandwidth<br>Spectral Mask<br>ACLR<br>PCDE<br>P-CCPCH<br>S-CCPCH<br>Code Spread 3<br>PICH<br>Code 128<br>Test Models<br>1 (16), (32), (64)<br>2<br>3 (16), (32)<br>4 (+CPICH), (-CPICH)<br>5 (2 HS), (4 HS), (8 HS) |

**Setup Parameters**

|                             |  |
|-----------------------------|--|
| Scrambling Code, Threshold  | Auto, Manual   |
| User Selectable             | Scrambling Code, S-CCPCH Spread, S-CCPCH Code, PICH Code, Threshold, Max Amp Power, CPICH Power, Frequency Error Average |
| Maximum Spreading Factor    | 256, 512   |
| Frequency                   | Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel   |
| Amplitude                   | Scale/Division, Power Offset, Auto Range, Adjust Range, Units (dBm/Watts)  |
| Marker                      | Six Markers, Table On/Off  |
| Sweep                       | Single/Continuous, Trigger Sweep   |
| Save/Recall                 | Setup, Measurement, Screen Shots (JPEG - save only), to Internal/External Memory   |
| Measurement Summary Screens | Overall Measurements, RF Measurements, Modulation Measurements   |

**RF Measurements**

|                                       |  |
|---------------------------------------|--|
| RF Channel Power Accuracy             | $\pm 1.25$ dB, $\pm 0.7$ dB typical, (temperature range 15 °C to 35 °C)  |
| Occupied Bandwidth Accuracy           | $\pm 100$ kHz  |
| Adjacent Channel Leakage Ratio (ACLR) | -54 dB/-59 dB $\pm 0.8$ dB @ 5 MHz/10 MHz offset, typical, 824 MHz to 894 MHz, 1710 MHz to 2170 MHz<br>-54 dB/-57 dB $\pm 1.0$ dB @ 5 MHz/10 MHz offset, typical, 2300 MHz to 2700 MHz |

**Demodulation Measurements**

|                      |  |
|----------------------|--|
| W-CDMA Modulations   | QPSK, QPSK-DTX (Codecs: AMR 4.75, 5.9, 7.4, 12.2 kbps, DTX 7.4, 12.2 kbps)                                       |
| HSPA+ Modulations    | QPSK, 16 QAM, 64 QAM   |
| Frequency Error      | $\pm 10$ Hz + time base error, 99 % confidence level   |
| EVM Accuracy         | $\pm 2.5$ %, $6\% \leq \text{EVM} \leq 25\%$   |
| Residual EVM         | 2.5 % typical  |
| Code Domain Power    | $\pm 0.5$ dB for code channel power $> -25$ dB,<br>16, 32, 64 DCPH (test model 1), 16, 32 DCPH (test model 2, 3) |
| CPICH (dBm) Accuracy | $\pm 0.8$ dB typical   |

**Over-the-Air (OTA) Measurements**

|                         |  |
|-------------------------|--|
| Scrambling Code Scanner | Six strongest Scrambling Codes                             |
| Multipath Scanner       | Multipath power of six signals relative to strongest pilot |

 TD-SCDMA/HSPA+ Signal Analyzer (Option 882)

| Measurements               |  |                       |                        |
|----------------------------|--|-----------------------|------------------------|
| RF                         | Demodulation                                       | Over-the-Air (OTA)    | Pass/Fail              |
| Channel Spectrum           | Code Domain Power/Error (QPSK/8 PSK/16 QAM/64 QAM) | Code Scan (32)        | View Pass/Fail Limits  |
| Channel Power              | Slot Power   | Scrambling Code Group | All, RF, Demod         |
| Occupied Bandwidth         | DwPTS Power  | Tau                   | Available Measurements |
| Left Channel Power         | Noise Floor  | $E_c/I_0$             | Occupied Bandwidth     |
| Left Channel Occ B/W       | Frequency Error                                    | DwPTS Power           | Channel Power          |
| Right Channel Power        | Tau  | Pilot Dominance       | Channel Power RCC      |
| Right Channel Occ B/W      | Scrambling Code                                    | Tau Scan (Six)        | On/Off Ratio           |
| Power vs. Time             | EVM  | Sync-DL#              | Peak-to-Average Ratio  |
| Six Slot Powers            | Peak EVM   | Tau                   | Frequency Error        |
| Channel Power (RRC)        | Peak Code Domain Error                             | $E_c/I_0$             | EVM                    |
| DL-UL Delta Power          | CDP Marker   | DwPTS Power           | Peak EVM               |
| UpPTS Power                | Modulation Summary                                 | Pilot Dominance       | Peak Code Domain Error |
| DwPTS Power                |  | Record                | Tau                    |
| On/Off Ratio               |  | Run/Hold              | Noise Floor            |
| Slot Peak-to-Average Power |  |                       |                        |
| Spectral Emission          |  |                       |                        |
| RF Summary                 |  |                       |                        |

## Setup Parameters

|                             |   |
|-----------------------------|---|
| Slot Selection              | Auto, 0-6   |
| Trigger                     | Trigger Type (No Trigger/GPS/External), External Trigger (Rising/Falling), Tau Offset |
| SYNC-DL Code                | Auto, 0-31  |
| Scrambling/Midamble Code    | Auto, 0-127   |
| Maximum Users               | Auto, 2, 4, 6, 8, 10, 12, 14, 16  |
| Measurement Speed           | Fast, Normal, Slow  |
| User Selectable             | Uplink Switch Point, Number of Carriers (1, 3), Tau Offset                            |
| Demodulation Type           | Auto, QPSK, 8 PSK, 16 QAM, 64 QAM   |
| Frequency                   | Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel      |
| Amplitude                   | Scale/Division, Power Offset, Auto Range, Adjust Range, Units (dBm/Watts)             |
| Sweep                       | Hold/Run, Trigger Sweep   |
| Save/Recall                 | Setup, Measurement, Screen Shots (JPEG - save only), to Internal/External Memory      |
| Measurement Summary Screens | Overall Measurements, RF Measurements, Modulation Measurements                        |

## RF Measurements

|                                 |   |
|---------------------------------|---|
| RF Channel Power Accuracy (RRC) | $\pm 1.5$ dB, $\pm 1.0$ dB typical, (slot power $-40$ dBm to $+10$ dBm) |
| Frequency Error                 | $\pm 10$ Hz + time base error, in the presence of a downlink slot       |

## Demodulation Measurements

|   |  |
|---|--|
| Supported Modulation                    | QPSK, 8 PSK, 16 QAM, 64 QAM                |
| Residual EVM (rms)                      | 3 % typical, P-CCPH Slot Power $> -50$ dBm |
| PN Offset                               | Within $1 \times 64$ chips                 |
| Pilot Power Accuracy                    | $\pm 1.0$ dB typical                       |
| Timing Error (Tau) for Dominant SYNC-DL | $\pm 0.2$ $\mu$ s (external trigger)       |
| Spreading Factor                        | 1, 16                                      |

## Over-the-Air (OTA) Measurements

|                         |   |
|-------------------------|---|
| Code Scanner            | 32 Sync Codes and associated Scrambling Code Groups |
| Tau Scanner             | Six strongest Sync Codes                            |
| Auto Save               | Yes   |
| GPS Tagging and Logging | Yes   |

 **LTE/LTE-A FDD/TDD Signal Analyzers (Option 883 and 886)**

**LTE/LTE-A FDD Measurements**

| RF   | Modulation   | Over-the-Air (OTA)  | Pass/Fail   |
|--|--|---|---|
| Channel Spectrum<br>Channel Power<br>Occupied Bandwidth<br>ACLR<br>Spectral Emission Mask<br>Category A or B (Opt 1)<br>RF Summary | Power vs. Resource Block (RB)<br>RB Power (PDSCH)<br>Active RBs, Utilization %<br>Channel Power, Cell ID<br>OSTP, Frame EVM by modulation<br>Constellation<br>QPSK, 16 QAM, 64 QAM<br>256 QAM Demod (Option 886)<br>Modulation Results<br>Ref Signal Power (RS)<br>Sync Signal Power (SS)<br>EVM – rms, peak, max hold<br>Frequency Error – Hz, ppm<br>Carrier Frequency<br>Cell ID<br>Control Channel Power<br>Bar Graph or Table View<br>RS, P-SS, S-SS<br>PBCH, PCFICH, PHICH, PDCCH<br>Total Power (Table View)<br>EVM per Control Channel<br>Tx Time Alignment<br>Modulation Summary<br>Includes EVM by modulation<br>Antenna Icons<br>Detects active antennas (1 or 2) | Scanner<br>Cell ID (Group, Sector)<br>S-SS, RSRP, RSRQ, SINR<br>Dominance<br>Modulation Results – On/Off<br>Auto Save – On/Off<br>Tx Test<br>Scanner<br>RS Power of MIMO antennas (2x2, 4x4)<br>Cell ID, Average Power<br>Delta Power (Max-Min)<br>Graph of Antenna Power<br>Modulation Results – On/Off<br>Mapping<br>On-screen<br>S-SS, RSRP, RSRQ, or SINR<br>Scanner<br>Modulation Results – Off<br>Carrier Aggregation<br>Up to 5 component carriers (CC1 to CC5)<br>CP, MIMO status, RS & SS Power, EVM,<br>Frequency Error, Time Alignment Error,<br>Cell ID | View Pass/Fail Limits<br>All, RF, Modulation<br>Available Measurements<br>Channel Power<br>Occupied Bandwidth<br>ACLR<br>Frequency Error<br>Carrier Frequency<br>Dominance<br>EVM peak, rms<br>Frame EVM by mod type<br>RS, SS Power<br>RS EVM<br>P-SS, S-SS, Power, EVM<br>PBCH, PCFICH, PHICH, PDCCH<br>Power, EVM<br>Cell, Group, Sector ID<br>OSTP<br>Tx Time Alignment |

**Setup Parameters**

|                             |  |
|-----------------------------|--|
| Frequency                   | E-UTRA Bands 1 - 14, 17 - 21, 23 - 32, 66A (tunable 10 MHz to 4.0 GHz)<br>Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel |
| Bandwidth (MHz)             | 1.4, 3, 5, 10, 15, 20  |
| Span (MHz)                  | Auto, 1.4, 3, 5, 10, 15, 20, 30  |
| Amplitude                   | Scale/Division, Power Offset, Auto Range, Adjust Range   |
| Sweep                       | Single/Continuous  |
| EVM Mode                    | Auto, PBCH only, Max Hold  |
| Cyclic Prefix (CP)          | Auto, Normal, Extended   |
| Sync Type                   | Normal (SS), RS/Cell ID  |
| Save/Recall                 | Setup, Measurement, Screen Shots (JPEG - save only), to Internal/External Memory   |
| Measurement Summary Screens | Overall Measurements, RF Measurements, Modulation Measurements   |

**LTE/LTE-A FDD RF Measurements**

RF Channel Power Accuracy ± 1.5 dB, ± 1.0 dB typical, (RF input -50 dBm to +10 dBm)

**LTE/LTE-A FDD Modulation Measurements**

|                    |  |
|--------------------|--|
| RS Power Accuracy  | ± 1.0 dB typical, (RF input -50 dBm to +10 dBm)                    |
| Frequency Error    | ± 10 Hz + time base error, 99 % confidence level                   |
| Residual EVM (rms) | 2.0 % typical (E-UTRA Test Model 3.1, RF Input -50 dBm to +10 dBm) |

**LTE/LTE-A FDD Over-the-Air (OTA) Measurements**

|                     |   |
|---------------------|---|
| Scanner             | Six strongest signals if present<br>Auto Save – Sync Signal power and Modulation Results with GPS information   |
| Tx Test             | Scanner – Three strongest signals if present<br>RS Power – Strongest signal   |
| Mapping             | Map On-screen S-SS, RSRP, RSRQ, or SINR of Cell ID with strongest signal<br>Scanner – three strongest signals if present<br>Save and Export Mapping data: KML, MTD (tab delimited)                                |
| Carrier Aggregation | Up to 5 component carriers specified (CC1 to CC5)<br>Automatic detection of CP and MIMO status for each active CC<br>RS Power & RS Delta Power, SS Power, EVM (peak and rms), Freq Error (Hz & ppm), TAE, Cell ID |


**LTE/LTE-A FDD/TDD Signal Analyzers (Option 883 and 886)** (Continued)

| LTE/LTE-A TDD Measurements  |   |   |   |
|---|---|---|---|
| RF  | Modulation  | Over-the-Air (OTA)  | Pass/Fail   |
| Channel Spectrum<br>Channel Power<br>Occupied Bandwidth   | Power vs. Resource Block (RB)<br>RB Power (PDSCH)<br>Active RBs, Utilization %  | Scanner<br>Cell ID (Group, Sector)<br>S-SS, RSRP, RSRQ, SINR  | View Pass/Fail Limits<br>All, RF, Modulation  |
| Power vs. Time<br>Frame View<br>Sub-Frame View<br>Total Frame Power<br>DwPTS Power<br>Transmit Off Power<br>Cell ID<br>Timing Error | Channel Power, Cell ID<br>OSTP, Frame EVM by modulation   | Dominance<br>Modulation Results - On/Off<br>Auto Save - On/Off  | Available Measurements<br>Channel Power<br>Occupied Bandwidth<br>ACLR                 |
| ACLR  | Constellation<br>QPSK, 16QAM, 64QAM<br>256 QAM Demod (Option 886)   | Tx Test<br>Scanner<br>RS Power of MIMO antennas (2x2, 4x4)  | Frequency Error<br>Carrier Frequency<br>Dominance                                     |
| Spectral Emission Mask<br>Category A or B (Opt 1)   | Modulation Results<br>Ref Signal Power (RS)<br>Sync Signal Power (SS)<br>EVM - rms, peak, max hold  | Cell ID, Average Power<br>Delta Power (Max-Min)<br>Graph of Antenna Power<br>Modulation Results - On/Off  | EVM peak, rms<br>Frame EVM by mod type<br>RS, SS Power                                |
| RF Summary  | Frequency Error - Hz, ppm<br>Carrier Frequency<br>Cell ID   | Mapping<br>On-screen<br>S-SS, RSRP, RSRQ, or SINR   | RS EVM<br>P-SS, S-SS, Power, EVM<br>PBCH, PCFICH, PHICH, PDCCH<br>Power, EVM          |
|   | Control Channel Power<br>Bar Graph or Table View<br>RS, P-SS, S-SS<br>PBCH, PCFICH, PHICH, PDCCH<br>Total Power (Table View)<br>EVM per Control Channel | Scanner<br>Modulation Results - Off   | Cell, Group, Sector ID<br>OSTP  |
|   | Tx Time Alignment<br>Modulation Summary<br>Includes EVM by modulation   | Carrier Aggregation<br>Up to 5 component carriers (CC1 to CC5)<br>CP, MIMO status, RS & SS Power, EVM,<br>Frequency Error, Time Alignment Error,<br>Cell ID | Tx Time Alignment<br>Frame Power<br>DwPTS Power<br>Transmit Off Power<br>Timing Error |
|   | Antenna Icons<br>Detects active antennas (1/2)  |   |   |

**Setup Parameters**

|  |  |
|--|--|
| Frequency  | E-UTRA bands 33 - 44 (tunable 10 MHz to 4.0 GHz)                                 |
| Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel |  |
| Bandwidth (MHz)  | 1.4, 3, 5, 10, 15, 20  |
| Span (MHz)   | Auto, 1.4, 3, 5, 10, 15, 20, 30  |
| Amplitude  | Scale/Division, Power Offset, Auto Range, Adjust Range                           |
| Sweep  | Single/Continuous, Trigger Sweep   |
| EVM Mode   | Auto, PBCH only, Max Hold  |
| Cyclic Prefix (CP)   | Auto, Normal, Extended   |
| Trigger  | No Trigger/Ext Trigger, Rising/Falling   |
| Uplink/Downlink Configuration  | 0 to 6   |
| Save/Recall  | Setup, Measurement, Screen Shots (JPEG - save only), to Internal/External Memory |
| Measurement Summary Screens  | Overall Measurements, RF Measurements, Modulation Measurements                   |

**LTE/LTE-A TDD RF Measurements**

|                           |   |
|---------------------------|---|
| RF Channel Power Accuracy | ± 1.5 dB, ± 1.0 dB typical, (RF input -30 dBm to +10 dBm) |
|---------------------------|---|

**LTE/LTE-A TDD Modulation Measurements**

|                    |  |
|--------------------|--|
| RS Power Accuracy  | ± 1.0 dB typical, (RF input -50 dBm to +10 dBm)                    |
| Frequency Error    | ± 10 Hz + time base error, 99 % confidence level                   |
| Residual EVM (rms) | 2.0 % typical (E-UTRA Test Model 3.1, RF Input -30 dBm to +10 dBm) |

**LTE/LTE-A TDD Over-the-Air (OTA) Measurements**

|                     |   |
|---------------------|---|
| Scanner             | Six strongest signals if present<br>Auto Save - Sync Signal power and Modulation Results with GPS information   |
| Tx Test             | Scanner - Three strongest signals if present<br>RS Power - Strongest signal   |
| Mapping             | Map On-screen S-SS, RSRP, RSRQ, or SINR of Cell ID with strongest signal<br>Scanner - three strongest signals if present<br>Save and Export Mapping data: KML, MTD (tab delimited)                                |
| Carrier Aggregation | Up to 5 component carriers specified (CC1 to CC5)<br>Automatic detection of CP and MIMO status for each active CC<br>RS Power & RS Delta Power, SS Power, EVM (peak and rms), Freq Error (Hz & ppm), TAE, Cell ID |





**NB-IoT Analyzer (Option 887)** (requires Option 9)

**Measurements**

NB-IoT Mode    Guard Band, Standalone

**RF Measurements**

|                        |  |
|------------------------|--|
| Summary Screen         | Carrier Frequency<br>Channel Power<br>Occupied Bandwidth<br>NPSS Power<br>NSSS Power<br>NPBCH Power<br>NPDCCH or NPDSCH Power<br>Cell ID<br>RSRP<br>RSRQ<br>SINR<br>Spectral Emission Mask Pass/Fail |
| Channel Spectrum       | Spans supported: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz, 30 MHz   |
| Spectral Emission Mask | Mask Type: NB-IoT Fixed<br>Summary Table Off/On (Mask Segment; Start, Stop, Peak Frequencies; Power; Power Margin; RBW; Status)  |
| Save/Recall            | Measurement (.iot), Setup (.stp), Screen Shots (.jpg) to Internal or External Memory   |


**CDMA/EV-DO Signal Analyzer (Option 884)**
**CDMA Measurements**

| RF                     | Demodulation            | Over-the-Air (OTA)             | Pass/Fail              |
|------------------------|-------------------------|--------------------------------|------------------------|
| Channel Spectrum       | Code Domain Power Graph | Pilot Scanner (Nine)           | View Pass/Fail Limits  |
| Channel Power          | Pilot Power             | PN                             | All, RF, Modulation    |
| Occupied Bandwidth     | Channel Power           | $E_c/I_o$                      | Available Measurements |
| Peak-to-Average Power  | Noise Floor             | Tau                            | Channel Power          |
| Spectral Emission Mask | Rho                     | Pilot Power                    | Occupied Bandwidth     |
| Single Carrier ACPR    | Carrier Feed Through    | Channel Power                  | Peak-to-Average Power  |
| Multi-carrier ACPR     | Tau                     | Pilot Dominance                | Spectral Mask Test     |
| RF Summary             | RMS Phase Error         | Multipath Scanner (Six)        | Frequency Error        |
|                        | Frequency Error         | $E_c/I_o$                      | Channel Frequency      |
|                        | Abs/Rel/ Power          | Tau                            | Pilot Power            |
|                        | Pilot                   | Channel Power                  | Noise Floor            |
|                        | Page                    | Multipath Power                | Rho                    |
|                        | Sync                    | Limit Test - 10 Tests Averaged | Carrier Feed Through   |
|                        | Q Page                  | Rho                            | Tau                    |
|                        | Code Domain Power Table | Adjusted Rho                   | RMS Phase Error        |
|                        | Code                    | Multipath                      | Code Utilization       |
|                        | Status                  | Pilot Dominance                | Measured PN            |
|                        | Power                   | Pilot Power                    | Pilot Dominance        |
|                        | Multiple Codes          | Pass/Fail Status               | Multipath Power        |
|                        | Code Utilization        |                                |                        |
|                        | Modulation Summary      |                                |                        |

**CDMA Setup Parameters**

|                             |  |
|-----------------------------|--|
| PN Setup                    | PN Trigger (No Trigger, GPS, External), PN Search Type (Auto, Manual), PN Offset |
| Walsh Codes                 | 64, 128  |
| Measurement Speed           | Fast, Normal, Slow   |
| External Trigger Polarity   | Rising, Falling  |
| Number of Carriers          | 1 to 5   |
| Carrier Bandwidth (MHz)     | 1.23, 1.24, 1.25   |
| Frequency                   | Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel |
| Amplitude                   | Scale/Division, Power Offset, Auto Range, Adjust Range, Units (dBm/Watts)        |
| Sweep                       | Single/Continuous, Trigger Sweep   |
| Save/Recall                 | Setup, Measurement, Screen Shots (JPEG - save only), to Internal/External Memory |
| Measurement Summary Screens | Overall Measurements, RF Measurements, Modulation Measurements                   |

**CDMA RF Measurements**

RF Channel Power Accuracy  $\pm 1.5$  dB,  $\pm 1.0$  dB typical, (RF input  $-50$  dBm to  $+20$  dBm)

**CDMA Demodulation Measurements**

|                      |  |
|----------------------|--|
| Frequency Error      | $\pm 10$ Hz + time base error, 99 % confidence level (in slow mode)      |
| Rho Accuracy         | $\pm 0.005$ , for Rho $> 0.9$  |
| Residual Rho         | $> 0.995$ , typical, $> 0.99$ maximum, (RF input $-50$ dBm to $+20$ dBm) |
| PN Offset            | $1 \times 64$ chips  |
| Pilot Power Accuracy | $\pm 1.0$ dB typical, relative to channel power                          |
| Tau                  | $\pm 0.5$ $\mu$ s typical, $\pm 1.0$ $\mu$ s maximum                     |

**CDMA Over-the-Air (OTA) Measurements**

|                   |  |
|-------------------|--|
| Pilot Scanner     | Nine strongest pilots                                      |
| Multipath Scanner | Multipath power of six signals relative to strongest pilot |
| Limit Test        | Average of ten tests compared to limit                     |

 **CDMA/EV-DO Signal Analyzer (Option 884)** (Continued)

**EV-DO Measurements**

| RF   | Demodulation   | Over-the-Air (OTA)  | Pass/Fail  |
|--|--|---|--|
| Channel Spectrum<br>Channel Power<br>Occupied Bandwidth<br>Peak-to-Average Power                         | MAC Code Domain Power Graph<br>Pilot & MAC Power<br>Channel Power<br>Frequency Error   | Pilot Scanner (Nine)<br>PN<br>$E_c/I_o$<br>Tau                                  | View Pass/Fail Limits<br>All, RF, Modulation<br>Available Measurements<br>Channel Power  |
| Power vs. Time<br>Pilot & MAC Power<br>Channel Power<br>Frequency Error<br>Idle Activity<br>On/Off Ratio | Rho Pilot<br>Rho Overall<br>Data Modulation<br>Noise Floor   | Pilot Power<br>Channel Power<br>Pilot Dominance                                 | Occupied Bandwidth<br>Peak-to-Average Power<br>Carrier Frequency<br>Frequency Error  |
| Spectral Emission Mask<br>Single Carrier ACPR<br>Multi-carrier ACPR<br>RF Summary                        | MAC Code Domain Power Table<br>Code<br>Status<br>Power<br>Code Utilization<br>Data Code Domain Power<br>Active Data Power<br>Data Modulation<br>Rho Pilot<br>Rho Overall<br>Maximum Data CDP<br>Minimum Data CDP<br>Modulation Summary | Multipath Scanner (Six)<br>$E_c/I_o$<br>Tau<br>Channel Power<br>Multipath Power | Spectral Mask<br>Noise Floor<br>Pilot Power<br>RMS Phase Error<br>Tau<br>Code Utilization<br>Measured PN<br>Pilot Dominance<br>Multipath Power |

**Setup Parameters**

|                             |  |
|-----------------------------|--|
| PN Setup                    | PN Trigger (No Trigger, GPS, External), PN Search Type (Auto, Manual), PN Offset |
| Walsh Codes                 | 64, 128  |
| Measurement                 | Speed Fast, Normal, Slow   |
| External Trigger Polarity   | Rising, Falling  |
| Slot Type                   | Auto, Active, Idle   |
| Number of Carriers          | 1 to 5   |
| Carrier Bandwidth (MHz)     | 1.23, 1.24, 1.25   |
| Frequency                   | Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel |
| Amplitude                   | Scale/Division, Power Offset, Auto Range, Adjust Range, Units (dBm/Watts)        |
| Sweep                       | Single/Continuous, Trigger Sweep   |
| Save/Recall                 | Setup, Measurement, Screen Shots (JPEG - save only), to Internal/External Memory |
| Measurement Summary Screens | Overall Measurements, RF Measurements, Modulation Measurements                   |

**EV-DO RF Measurements**

RF Channel Power Accuracy ± 1.5 dB, ± 1.0 dB typical, (RF input -50 dBm to +20 dBm)

**EV-DO Demodulation Measurements**

|                      |  |
|----------------------|--|
| EV-DO Compatibility  | Rev 0 and Rev A  |
| Frequency Error      | ± 10 Hz + time base error, 99 % confidence level               |
| Rho Accuracy         | ± 0.01, for Rho > 0.9  |
| Residual Rho         | > 0.995 typical, > 0.99, maximum (RF input -50 dBm to +20 dBm) |
| PN Offset            | Within 1 x 64 chips  |
| Pilot Power Accuracy | ± 1.0 dB typical, relative to channel power                    |
| Tau                  | ± 0.5 µs typical, ± 1.0 µs maximum                             |

**EV-DO Over-the-Air (OTA) Measurements**

|                   |  |
|-------------------|--|
| Pilot Scanner     | Nine strongest pilots                                      |
| Multipath Scanner | Multipath power of six signals relative to strongest pilot |

 **WiMAX Fixed/Mobile Signal Analyzer (Option 885)**
**WiMAX Fixed Measurements**

| RF  | Demodulation   | Over-the-Air (OTA)                               | Pass/Fail  |
|---|--|--|--|
| Channel Spectrum<br>Channel Power<br>Occupied Bandwidth                               | Constellation<br>RCE (RMS/Peak)<br>EVM (RMS/Peak)  | There are no additional OTA Measurements         | View Pass/Fail Limits<br>All, RF, Modulation   |
| Power vs. Time<br>Channel Power<br>Preamble Power<br>Data Burst Power<br>Crest Factor | Frequency Error<br>Carrier Frequency<br>Base Station ID  | RF and Demodulation Measurements can be made OTA | Available Measurements<br>Channel Power<br>Occupied Bandwidth<br>Burst Power<br>Preamble Power<br>Crest Factor |
| ACPR  | Spectral Flatness<br>Adjacent Subcarrier Flatness  |  | Frequency Error<br>Carrier Frequency   |
| RF Summary  | EVM vs. Subcarrier/Symbol<br>RCE<br>EVM<br>Frequency Error<br>Carrier Frequency<br>Base Station ID<br>Sector ID (Mobile)<br>Modulation Summary |  | Carrier Frequency<br>EVM<br>RCE<br>Base Station ID   |

**Setup Parameters**

|                             |  |
|-----------------------------|--|
| Bandwidth (MHz)             | 1.25, 1.50, 2.50, 3.50, 5.00, 5.50, 6.00, 7.00, 10.00                            |
| Cyclic Prefix Ratio (CP)    | 1/4, 1/8, 1/16, 1/32   |
| Span (MHz)                  | 5, 10, 15, 20  |
| Frame Length (ms)           | 2.5, 5.0, 10.0   |
| Frequency                   | Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel |
| Amplitude                   | Scale/Division, Power Offset, Auto Range, Adjust Range                           |
| Sweep                       | Single/Continuous, Trigger Sweep   |
| Save/Recall                 | Setup, Measurement, Screen Shots (JPEG - save only), to Internal/External Memory |
| Measurement Summary Screens | Overall Measurements, RF Measurements, Modulation Measurements                   |

**WiMAX Fixed RF Measurements** (temperature range 15 °C to 35 °C)

RF Channel Power Accuracy ± 1.5 dB, ± 1.0 dB typical, (RF input -50 dBm to +20 dBm)

**WiMAX Fixed Demodulation Measurements** (temperature range 15 °C to 35 °C)

|                    |  |
|--------------------|--|
| Frequency Error    | $7 \times 10^{-8}$ plus time base error, 99 % confidence level |
| Residual EVM (rms) | 3 % typical, 3.5 % maximum (RF Input -50 dBm to +20 dBm)       |

 **WiMAX Fixed/Mobile Signal Analyzer (Option 885)** (Continued)

**WiMAX Mobile Measurements<sup>1</sup>**

| RF                     | Demodulation                 | Over-the-Air (OTA)     | Pass/Fail              |
|------------------------|------------------------------|------------------------|------------------------|
| Channel Spectrum       | Constellation                | Channel Power Monitor  | View Pass/Fail Limits  |
| Channel Power          | RCE (RMS/Peak)               | Preamble Scanner (Six) | All, RF, Modulation    |
| Occupied Bandwidth     | EVM (RMS/Peak)               | Preamble               | Available Measurements |
| Power vs. Time         | Frequency Error              | Relative Power         | Channel Power          |
| Channel Power          | CINR                         | Cell ID                | Occupied Bandwidth     |
| Preamble Power         | Base Station ID              | Sector ID              | Downlink Burst Power   |
| Downlink Burst Power   | Sector ID                    | PCINR                  | Uplink Burst Power     |
| Uplink Burst Power     | Spectral Flatness            | Dominant Preamble      | Preamble Power         |
| ACPR                   | Adjacent Subcarrier Flatness | Base Station ID        | Crest Factor           |
| Spectral Emission Mask | EVM vs. Subcarrier/Symbol    | Auto Save - On/Off     | Frequency Error        |
| RF Summary             | RCE (RMS/Peak)               |                        | Carrier Frequency      |
|                        | EVM (RMS/Peak)               |                        | EVM                    |
|                        | Frequency Error              |                        | RCE                    |
|                        | CINR                         |                        | Sector ID              |
|                        | Base Station ID              |                        |                        |
|                        | Sector ID                    |                        |                        |
|                        | DL-MAP (Tree View)           |                        |                        |
|                        | Modulation Summary           |                        |                        |

**Setup Parameters**

|                             |  |
|-----------------------------|--|
| Zone Type                   | PUSC   |
| DL-MAP Auto Decoding        | Convolutional Coding (CC), Convolutional Turbo Coding (CTC)                      |
| Bandwidths (MHz)            | 3.50, 5.00, 7.00, 8.75, 10.00  |
| Cyclic Prefix Ratio (CP)    | 1/8  |
| Span (MHz)                  | 5, 10, 20, 30  |
| Frame Lengths (ms)          | 5, 10  |
| Demodulation                | Auto, Manual, FCH  |
| Frequency                   | Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel |
| Amplitude                   | Scale/Division, Power Offset, Auto Range, Adjust Range                           |
| Sweep                       | Single/Continuous, Trigger Sweep   |
| Save/Recall                 | Setup, Measurement, Screen Shots (JPEG - save only), to Internal/External Memory |
| Measurement Summary Screens | Overall Measurements, RF Measurements, Modulation Measurements                   |

**WiMAX Mobile RF Measurements** (temperature range 15 °C to 35 °C)

RF Channel Power Accuracy ± 1.5 dB, ± 1.0 dB typical, (RF input -50 dBm to +20 dBm)

**WiMAX Mobile Demodulation Measurements** (temperature range 15 °C to 35 °C)

Frequency Error 2 x 10<sup>-8</sup> plus time base error, 99 % confidence level  
Residual EVM (rms) 2.5 % typical, 3.0 % maximum (RF Input -50 dBm to +20 dBm)

**WiMAX Mobile Over-the-Air (OTA) Measurements**

Channel Power Monitor Over time (one week), measurement time interval 1 s to 60 s  
Preamble Scanner Six Strongest Preambles  
Auto Save Yes  
GPS Tagging and Logging Yes

1. Mobile WiMAX conforms to IEEE Std. 802.16e-2005, WiMAX Forum<sup>®</sup> Air Interface - Mobile System Profile - Release 1.0 Certified, System Profiles according to WMF-T24-001-R010v07.

## General Specifications

### Setup Parameters

|                             |  |
|-----------------------------|--|
| System                      | Status (Temperature, Battery Info, S/N, Firmware Version, Installed Options), Self Test, Application Self Test, GPS (see Option 31), Name, Date and Time, Ethernet Configuration, Volume   |
| System Options              | Display (Brightness, Auto Dim, Blank, Default, Black & White, Night Vision, High Contrast, Invert Black & White)<br>Language (English, French, German, Spanish, Chinese, Japanese, Korean, Italian, Russian, Portuguese)<br>Reset (Factory Defaults, Master Reset, Update Firmware)<br>Share Center Frequency and Power (All Modes or Not Shared)<br>Power-On (via Power Switch or when DC is Applied) |
| File Save/Recall            | Save As, Save Measurement, Save, Save On Event, Recall Measurement, Recall, Copy, Delete<br>Setups, Measurements, Screen Shots JPEG (save only), Limit Lines, Spurious Emissions Mask, Mapping results (for options with mapping), including KML with or without altitude, tab-delimited   |
| Delete                      | By File Type, All, Selected  |
| Internal Trace/Setup Memory | > 40,000 single-trace measurements; > 500 Spectrograms, each with 156 traces (with Option 25)  |
| External Trace/Setup Memory | Limited by size of USB Flash Drive   |

### Connectors

|                        |   |
|------------------------|---|
| RF In                  | 9 GHz to 20 GHz Instruments: Type N, female, 50 Ω<br>32 GHz to 43 GHz Instruments: Ruggedized Type K, male      |
| RF Out                 | 9 GHz to 20 GHz Instruments: Type N, female, 50 Ω   |
| GPS                    | SMA Female  |
| External Power         | 5.5 mm barrel connector, 12 to 14.5 VDC, < 5.0 A  |
| Ethernet               | RJ45, 10/100 Mbps, connect to PC or LAN for remote access   |
| USB Interface          | Two Type A, Connect FAT32 formatted Flash Drive and Power Sensor; 5-pin mini-B, Connect to PC for data transfer |
| Headset Jack           | 3.5 mm 3-wire headset jack  |
| External Reference In  | BNC, female, 50 Ω, Maximum Input +10 dBm  |
| External Reference Out | BNC, female, 50 Ω, 10 MHz   |
| External Trigger       | BNC, female, 50 Ω, TTL-compatible levels, Maximum Input +5 VDC  |
| IF Out                 | BNC, female, 50 Ω, 140 MHz (nominal)  |

### Display and Keyboard

|               |   |
|---------------|---|
| Display       | 8.4 inch Touchscreen, 800 x 600 Resolution                        |
| Pixel Defects | No more than five defective pixels (99.9989% good pixels)         |
| Keyboard      | Backlit (Red for Night Vision, White for all other display modes) |

### Battery

|                         |  |
|-------------------------|--|
| Type                    | Li-Ion                                   |
| Battery Operation       | 3 hour operation, typical                |
| Battery Charging Limits | 0 °C to +45 °C, Relative Humidity ≤ 80 % |

### Regulatory Compliance

|                           |  |
|---------------------------|--|
| European Union            | EMC 2014/30/EU, EN 61326:2013, CISPR 11/EN 55011, IEC/EN 61000-4-2/3/4/5/6/8/11<br>Low Voltage Directive 2014/35/EU<br>Safety EN 61010-1:2010, IEC 60950-1 (when used with Anritsu Company supplied Power Supply)<br>RoHS Directive 2011/65/EU |
| Australia and New Zealand | RCM AS/NZS 4417:2012   |
| Canada                    | ICES-1(A)/NMB-1(A)   |
| South Korea               | KCC-REM-A21-0004   |

### Environmental

|                             |   |
|-----------------------------|---|
|                             | MIL-PRF-28800F Class 2  |
| Operating Temperature Range | -10 °C to 55 °C   |
| Storage Temperature Range   | -40 °C to 71 °C   |
| Maximum Relative Humidity   | 95 % RH at 40 °C, non-condensing  |
| Vibration, Sinusoidal       | 5 Hz to 55 Hz   |
| Vibration, Random           | 10 Hz to 500 Hz   |
| Half Sine Shock             | 30 g <sub>n</sub>   |
| Altitude                    | 4600 meters, operating and non-operating                                  |
| Explosive Atmosphere        | MIL-PRF-28800F Section 4.5.6.3<br>MIL-STD-810G, Method 511.5, Procedure 1 |

### Warranty

|          |  |
|----------|--|
| Duration | Standard three-year warranty<br>One-year warranty on battery |
|----------|--|

### Size and Weight

|        |  |
|--------|--|
| Size   | 315 mm x 211 mm x 77 mm, (12.4 in x 8.3 in x 3.0 in)                                     |
| Weight | 3.7 kg to 4.4 kg (8.1 lb to 9.8 lb) depending on Frequency Option and Tracking Generator |


 **easyTest Tools™** (for your PC)

**Instrument Modes**

Spectrum Analyzer  
Interference Analyzer  
Channel Scanner  
AM/FM/PM Analyzer

**Commands**

|               |  |
|---------------|--|
| Display Image | Allows putting a custom image on the instrument screen   |
| Recall Setup  | Places the instrument into a known state; auto-advance to next command available   |
| Prompt        | Displays instructional messages on the instrument screen; timed advance to next command available; instrument users can be allowed or disallowed from making setup adjustments |
| Save          | Allows automatic or manual saving of traces; auto-advance to next command available  |

 **easyMap Tools™** (create instrument-compatible maps on your PC)

**Outdoor Maps**

|                 |   |
|-----------------|---|
| On-Line Sources | Google Maps, Cloud Made Open-Source Maps              |
| Pan & Zoom Mode | AZM map file format allows pan and zoom on-instrument |
| Legacy Mode     | MAP format is compatible with older firmware          |
| Geo-Referenced  | Works with instrument based GPS                       |
| Map Conversion  | Convert scanned maps to geo-referenced                |

**Indoor Maps**

|         |   |
|---------|---|
| Sources | Scanned images in JPG, JPEG, JPE, JFIF, GIF, TIF, TIFF, PNG |
|---------|---|

**General**

|              |  |
|--------------|--|
| Color Filter | Grayscale, High Contrast                         |
| Coverage     | Worldwide  |
| Zoom Levels  | 16 total zoom levels, 7 available in any one map |
| Map Size     | Less than 1 MB to over 1 GB                      |

 **Master Software Tools** (for your PC)

**Measurement Viewing**

|                                    |   |
|------------------------------------|---|
| Display                            | Modify display settings, including scale  |
| Spectrum Traces                    | Add, delete, and modify limit lines and markers. Overlay traces.  |
| Spectrum Analyzer Measurements     | Field Strength, Occupied Bandwidth, Channel Power, ACPR, Emission Mask, C/I <sup>1</sup>  |
| Interference Analyzer Measurements | Spectrograms, Signal Strength Meter, RSSI <sup>2</sup>  |
| Non-Spectrum Measurements          | Hi Accuracy Power Meter, Channel Scanner, GSM, WCDMA/HSPA, LTE, TD-LTE, TD-SCDMA, CDMA, EV-DO, Fixed WiMAX, Mobile WiMAX, Screen captures (JPEGs) |

1. Spurious Emissions results viewable in a browser  
2. Coverage Mapping and Interference Mapping files viewable in spreadsheet, Google Earth, or Google Maps

**Database Management**

|                      |   |
|----------------------|---|
| Full Trace Retrieval | Retrieve all traces from instrument into one PC directory (limited to approximately 15,000 files) |
| Trace Catalog        | Index all traces in selected folder & subfolder on PC into one catalog                            |
| Trace Rename Utility | Rename measurement traces   |
| Group Edit           | Titles, subtitles, plot scaling, markers and limit lines, simultaneously on similar files         |

**Data Analysis**

|                          |                            |
|--------------------------|----------------------------|
| Trace Math and Smoothing | Compare multiple traces    |
| Measurement Calculator   | Translate into other units |

**Report Generation**

|                     |  |
|---------------------|--|
| Report Generator    | Includes GPS, power level, and measurements                    |
| Edit Graph          | Change scale, limit lines, and markers                         |
| Report Format       | Create reports in HTML   |
| Export Measurements | Export measurements or entire folders to *.jpg or *.csv format |
| Notes               | Annotate measurements  |

**Mapping** (GPS required on instrument)

|                        |                           |
|------------------------|---------------------------|
| Spectrum Analyzer Mode | MapInfo                   |
| LTE Mode               | Google Earth, Google Maps |

**Master Software Tools** (Continued)**Spectrogram** (Spectrum Monitoring for Interference Analysis and Spectrum Clearing)

|                             |   |
|-----------------------------|---|
| Source                      | Recorded Spectrogram or multiple spectrum traces  |
| Folder Spectrogram          | 2D View creates a composite file of multiple traces   |
| Available Displays          | Spectrogram, Peak Power vs. Time, Variation in Total Power vs. Time, Peak Frequency vs. Time, Number of Traces Saved vs. Time (useful with Save on Limit Exceeded), Maximum/Average/Minimum Power vs. Time<br>File Filter (Violations over limit lines or deviations from averages)<br>Playback |
| Display Functions per Trace | Markers, GPS location altitude and time (when recorded), instrument time<br>Filename per trace for Folder Spectrogram   |
| Export to Video             | Create AVI file of 2D Spectrogram for management review/reports   |
| Export to 3D Spectrogram    | Views (Set Threshold, Markers)<br>- 3D (Rotate X, Y, Z Axis, Level Scale, Signal ID)<br>- 2D (Frequency or Time Domain, Signal ID)<br>- Top Down<br>Playback (Frequency and/or Time Domain)   |

**List/Parameter Editors**

|                                    |  |
|------------------------------------|--|
| Antennas, Cables, Signal Standards | Modify instrument's Antenna, Cable, and Signal Standard List |
| Pass/Fail                          | Create, download, or edit Signal Analysis Pass/Fail Limits   |
| Script Master                      | Create Script Master files for GSM/WCDMA or Channel Scanner  |
| Languages                          | Modify non-English language menus                            |
| Mobile WiMAX                       | DL-MAP Parameters  |

**Connectivity**

|                    |  |
|--------------------|--|
| Connections        | Connect to PC using USB, LAN, or Direct Ethernet connection  |
| Network Search     | Find all Anritsu handheld instruments on local network   |
| Download           | Download measurements and live traces to PC for storage and analysis   |
| Upload             | Upload measurements and other files from PC to instrument  |
| Remote Access Tool | Remote control and monitoring of instrument (via Ethernet port) over the Internet  |
| Export             | Measurements can be saved in various formats, depending on the measurement type, including JPEG, CSV, and Anritsu DAT format |
| Printing           | Print individual or all measurement screens  |

**Web Remote Control**














|                   |  |
|-------------------|--|
| Control           | Full instrument control through a browser - all instrument functions except power switch and rotary knob   |
| Connections       | RJ45 Ethernet jack<br>Third party Wi-Fi router   |
| Protocol          | HTTP/TCP/IP  |
| Physical Layer    | Cat 5 Cable, Wi-Fi router compatible   |
| Software Required | HTML 5 Compliant Browser - Newer versions of Chrome, Firefox, Internet Explorer and others   |
| Operating System  | iOS, Windows, Linux, Android operating systems that can host the HTML 5 Compliant browser  |
| Remote Hardware   | PCs, Tablets, and Smart Phones with Ethernet or Wi-Fi connections and a HTML 5 Compliant browser   |
| Download          | Individual instrument files downloaded via browser<br>Multiple instrument files and directories zipped and downloaded via browser<br>Screen capture capability |
| Display Modes     | Normal: All modes & displays supported<br>Fast: Spectrum traces update faster (up to 5 updates per second)   |
| Password          | The instrument can be password protected<br>Passwords may be used to manage who is controlling the instrument  |
| Users/Instruments | One user/device can view and control many instruments  |

**Programmable Remote Control**

|                      |   |
|----------------------|---|
| Functionality        | Many instrument functions are programmable. See the Programming Manual for details. |
| Programming Language | Standard Commands for Programmable Instruments (SCPI)                               |
| Interfaces           | USB, LAN  |
| Available Drivers    | LabView. Visit NI.com for driver.   |



## Ordering Information – Instrument Options

|   | Part Number  | Description  |
|---|--------------|--|
|   | MS2720T      | Spectrum Master (requires Option 709, 713, 720, 732, or 743)   |
|   | MS2720T-0709 | Frequency Range 9 kHz to 9 GHz   |
|   | MS2720T-0713 | Frequency Range 9 kHz to 13 GHz  |
|    | MS2720T-0720 | Frequency Range 9 kHz to 20 GHz  |
|   | MS2720T-0732 | Frequency Range 9 kHz to 32 GHz  |
|   | MS2720T-0743 | Frequency Range 9 kHz to 43 GHz  |
|   | MS2720T-0809 | 9 GHz Tracking Generator (requires Option 709)   |
|    | MS2720T-0813 | 13 GHz Tracking Generator (requires Option 713)  |
|   | MS2720T-0820 | 20 GHz Tracking Generator (requires Option 720)  |
|    | MS2720T-0025 | Interference Analyzer (Option 31 is recommended)   |
|    | MS2720T-0027 | Channel Scanner  |
|    | MS2720T-0431 | Coverage Mapping (requires Option 31 for full functionality)   |
|    | MS2720T-0444 | EMF Measurements (requires Anritsu Isotropic Antenna)  |
|   | MS2720T-0509 | AM/FM/PM Measurements (Option 431 required for full functionality)   |
|   | MS2720T-0024 | I/Q Waveform Capture (requires Option 9)   |
|   | MS2720T-0089 | Zero-Span IF Output  |
|   | MS2720T-0090 | Gated Sweep  |
|  | MS2720T-0019 | High Accuracy Power Meter (requires USB Power Sensor, sold separately)   |
|   | MS2720T-0009 | Demodulation Hardware  |
|  | MS2720T-0880 | GSM/GPRS/EDGE Measurements (requires Option 9)   |
|  | MS2720T-0881 | W-CDMA/HSPA+ Measurements (requires Option 9, Option 31 recommended)   |
|  | MS2720T-0882 | TD-SCDMA/HSPA+ Measurements (requires Option 9, Option 31 required for full functionality)                                 |
|  | MS2720T-0883 | LTE/LTE-A FDD/TDD Measurements (requires Option 9, Option 31 required for full functionality)                              |
|   | MS2720T-0886 | LTE 256 QAM Demodulation (requires Option 883)   |
|  | MS2720T-0887 | NB-IoT Measurements (requires Option 9)  |
|  | MS2720T-0884 | CDMA/EV-DO Measurements (requires Option 9, Option 31 required for full functionality)                                     |
|  | MS2720T-0885 | WiMAX Fixed/Mobile Measurements (requires Option 9, Option 31 required for full functionality)                             |
|   | MS2720T-0007 | Secure Data Operation  |
|   | MS2720T-0031 | GPS Receiver (requires GPS Antenna, sold separately)   |
|   | MS2720T-0098 | Standard Calibration to ISO17025 and ANSI/NCSL Z540-1. Includes calibration certificate.                                   |
|   | MS2720T-0099 | Premium Calibration to ISO17025 and ANSI/NCSL Z540-1. Includes calibration certificate, test report, and uncertainty data. |



Optional Accessories

Backpack and Transit Case



| Part Number | Description  |
|-------------|--|
| 67135       | Anritsu Backpack (For Handheld Instrument and PC)  |
| 760-243-R   | Large Transit Case with Wheels and Handle<br>56 cm x 45.5 cm x 26.5 cm (22.07" x 17.92" x 10.42")  |
| 760-261-R   | Large Transit Case with Wheels and Handle<br>63.1 cm x 50 cm x 30 cm (24.83" x 19.69" x 11.88"), space for MA2700A, antennas, filters, instrument inside soft case, and other interference hunting accessories/tools |
| 760-262-R   | Transit Case for MA2700A, several Yagi antennas and filters  |
| 760-271-R   | Transit Case for Portable Directional Antennas and Port Extender<br>52.4 cm x 42.8 cm x 20.6 cm (20.62" x 16.87" x 8.12")<br>(for 2000-1777-R, 2000-1778-R, 2000-1779-R, 2000-1798-R)                                |
| 760-286-R   | Compact Transit Case with Wheels and Handle<br>55.6 cm x 35.5 cm x 22.9 cm (21.89" x 13.98" x 9.01")   |

Miscellaneous Accessories



| Part Number | Description   |
|-------------|---|
| 2000-1374-R | External Dual Charger for Li-Ion Batteries  |
| 633-75      | Rechargeable Li-Ion Battery, 7500 mAh   |
| 2000-1689-R | EMI Near Field Probe Kit  |
| MA2700A     | Handheld Interference Hunter (For full specifications, refer to the MA2700A Technical Data Sheet 11410-00692) |
| 2000-1884-R | PIM Hunter™ Test Probe (For full specifications, refer to the 2000-1884-R Technical Data Sheet 11410-00999)   |
| 2000-1691-R | Stylus with Coiled Tether   |
| 2000-1797-R | Touchscreen Protective Film, 8.4 in   |
| 2000-1798-R | Port Extender, DC to 6 GHz, N(m) to N(f)  |
| MA25401A    | Atomic Clock, External, 10 MHz Frequency Reference (see 11410-01134 for details)                              |
| 66864       | Rack Mount Kit, Master Platform   |

GPS Antennas (active)



| Part Number | Description   |
|-------------|---|
| 2000-1528-R | Magnet Mount, SMA(m) with 5 m (16.4 ft) cable, requires 5 VDC           |
| 2000-1652-R | Magnet Mount, SMA(m) with 0.3 m (1 ft) cable, requires 3.3 VDC or 5 VDC |
| 2000-1760-R | Miniature Antenna, SMA(m), requires 2.5 VDC to 3.7 VDC                  |

Directional Antennas



| Part Number | Description  |
|-------------|--|
| 2000-1411-R | 824 MHz to 896 MHz, N(f), 12.3 dBi, Yagi   |
| 2000-1412-R | 885 MHz to 975 MHz, N(f), 12.6 dBi, Yagi   |
| 2000-1413-R | 1710 MHz to 1880 MHz, N(f), 12.3 dBi, Yagi                                       |
| 2000-1414-R | 1850 MHz to 1990 MHz, N(f), 11.4 dBi, Yagi                                       |
| 2000-1415-R | 2400 MHz to 2500 MHz, N(f), 14.1 dBi, Yagi                                       |
| 2000-1416-R | 1920 MHz to 2170 MHz, N(f), 14.3 dBi, Yagi                                       |
| 2000-1659-R | 698 MHz to 787 MHz, N(f), 10.1 dBi, Yagi   |
| 2000-1660-R | 1425 MHz to 1535 MHz, N(f), 14.3 dBi, Yagi                                       |
| 2000-1715-R | Directional Antenna, 698 MHz to 2500 MHz, N(f), gain of 2 dBi to 10 dBi, typical |
| 2000-1726-R | Antenna, 2500 MHz to 2700 MHz, N(f), 14.1 dBi, Yagi                              |
| 2000-1747-R | Antenna, Log Periodic, 300 MHz to 7000 MHz, N(f), 5.1 dBi, typical               |
| 2000-1748-R | Antenna, Log Periodic, 1 GHz to 18 GHz, N(f), 6 dBi, typical                     |
| 2000-1777-R | Portable Directional Antenna, 9 kHz to 20 MHz, N(f)                              |
| 2000-1778-R | Portable Directional Antenna, 20 MHz to 200 MHz, N(f)                            |
| 2000-1779-R | Portable Directional Antenna, 200 MHz to 500 MHz, N(f)                           |
| 2000-1812-R | Portable Yagi Antenna, 450 MHz to 512 MHz, N(f), 7.1 dBi                         |
| 2000-1825-R | Portable Yagi Antenna, 380 MHz to 430 MHz, N(f), 7.1 dBi                         |

**Portable Antennas**



- 2000-1200-R 806 MHz to 866 MHz, SMA(m), 50 Ω
- 2000-1473-R 870 MHz to 960 MHz, SMA(m), 50 Ω
- 2000-1035-R 896 MHz to 941 MHz, SMA(m), 50 Ω (1/2 wave)
- 2000-1030-R 1710 MHz to 1880 MHz, SMA(m), 50 Ω (1/2 wave)
- 2000-1474-R 1710 MHz to 1880 MHz with knuckle elbow (1/2 wave)
- 2000-1031-R 1850 MHz to 1990 MHz, SMA(m), 50 Ω (1/2 wave)
- 2000-1475-R 1920 MHz to 1980 MHz and 2110 MHz to 2170 MHz, SMA(m), 50 Ω
- 2000-1032-R 2400 MHz to 2500 MHz, SMA(m), 50 Ω (1/2 wave)
- 2000-1361-R 2400 MHz to 2500 MHz, 5000 MHz to 6000 MHz, SMA(m), 50 Ω
- 2000-1751-R 698 MHz to 960 MHz, 1710 MHz to 2100 MHz, 2500 MHz to 2700 MHz, SMA(m), 2 dB, typical, 50 Ω
- 2000-1636-R Antenna Kit (Consists of: 2000-1030-R, 2000-1031-R, 2000-1032-R, 2000-1200-R, 2000-1035-R, 2000-1361-R, and carrying pouch)

**Directional Horn Antennas**



- | Part Number | Description  |
|-------------|--|
| 2000-1867-R | 17.6 GHz to 26.7 GHz, WR42, 25 dBi gain  |
| 2000-1868-R | 26.4 GHz to 40.1 GHz, WR28, 25 dBi gain  |
| 2000-1869-R | 33.0 GHz to 50.1 GHz, WR22, 25 dB gain   |
| 2000-1870-R | 39.3 GHz to 59.7 GHz, WR19, 25 dBi gain  |
| 2000-2003-R | 24 GHz to 40 GHz, WR28, 19 dBi gain (small form factor assembly with K(f) adapter, mounting bracket, and case) |

**Isotropic Antenna**



2000-1800-R 9 kHz to 300 MHz  
 2000-1792-R 30 MHz to 3 GHz  
 2000-1791-R 700 MHz to 6 GHz

- | Part Number | Description                                  |
|-------------|--|
| 2000-1791-R | Isotropic Antenna, 700 MHz to 6000 MHz, N(m) |
| 2000-1792-R | Isotropic Antenna, 30 MHz to 3000 MHz, N(m)  |
| 2000-1800-R | Isotropic Antenna, 9 kHz to 300 MHz, N(m)    |

**Mag Mount and Broadband Antennas**



| Part Number | Description   |
|-------------|---|
| 2000-1616-R | 20 MHz to 21000 MHz, N(f), 50 Ω   |
| 2000-1645-R | 694 MHz to 894 MHz, 3 dBi peak gain<br>1700 MHz to 2700 MHz, 3 dBi peak gain, N(m), 50 Ω, 10 ft   |
| 2000-1646-R | 750 MHz to 1250 MHz, 3 dBi peak gain,<br>1650 MHz to 2700 MHz, 5 dBi peak gain  |
| 2000-1647-R | Cable 1: 698 MHz to 1200 MHz, 2 dBi peak gain,<br>1700 MHz to 2700 MHz, 5 dBi peak gain, N(m), 50 Ω, 10 ft<br>Cable 2: 3000 MHz to 6000 MHz, 5 dBi peak gain, N(m), 50 Ω, 10 ft<br>Cable 3: GPS 26 dB gain, SMA(m), 50 Ω, 10 ft |
| 2000-1946-R | Cable 1: 617 MHz to 960 MHz, 3 dBi peak gain,<br>1710 MHz to 3700 MHz, 4 dBi peak gain, N(m), 50 Ω, 10 ft<br>Cable 2: 3000 MHz to 6000 MHz, 5 dBi peak gain, N(m), 50 Ω, 10 ft<br>Cable 3: GPS 26 dB gain, SMA(m), 50 Ω, 10 ft  |
| 2000-1648-R | 1700 MHz to 6000 MHz, 3 dBi peak gain, N(m), 50 Ω, 10 ft  |

**Bandpass Filters**



| Part Number | Description  |
|-------------|--|
| 1030-114-R  | 806 MHz to 869 MHz, N(m) to SMA(f), 50 Ω                   |
| 1030-109-R  | 824 MHz to 849 MHz, N(m) to SMA(f), 50 Ω                   |
| 1030-110-R  | 880 MHz to 915 MHz, N(m) to SMA(f), 50 Ω                   |
| 1030-111-R  | 1850 MHz to 1910 MHz, N(m) to SMA(f), 50 Ω                 |
| 1030-112-R  | 2400 MHz to 2484 MHz, N(m) to SMA(f), 50 Ω                 |
| 1030-105-R  | 890 MHz to 915 MHz, N(m) to N(f), 50 Ω                     |
| 1030-106-R  | 1710 MHz to 1790 MHz, N(m) to N(f), 50 Ω                   |
| 1030-107-R  | 1910 MHz to 1990 MHz, N(m) to N(f), 50 Ω                   |
| 1030-149-R  | High Pass, 150 MHz, N(m) to N(f), 50 Ω                     |
| 1030-150-R  | High Pass, 400 MHz, N(m) to N(f), 50 Ω                     |
| 1030-151-R  | High Pass, 700 MHz, N(m) to N(f), 50 Ω                     |
| 1030-152-R  | Low Pass, 200 MHz, N(m) to N(f), 50 Ω                      |
| 1030-153-R  | Low Pass, 550 MHz, N(m) to N(f), 50 Ω                      |
| 1030-155-R  | 2500 MHz to 2700 MHz, N(m) to N(f), 50 Ω                   |
| 1030-178-R  | 1920 MHz to 1980 MHz, N(m) to N(f), 50 Ω                   |
| 1030-179-R  | 777 MHz to 798 MHz, N(m) to N(f), 50 Ω                     |
| 1030-180-R  | 2500 MHz to 2570 MHz, N(m) to N(f), 50 Ω                   |
| 2000-1684-R | 791 MHz to 821 MHz, N(m) to N(f), 50 Ω                     |
| 2000-1734-R | Bandpass Filter, 699 MHz to 715 MHz, N(m) and N(f), 50 Ω   |
| 2000-1735-R | Bandpass Filter, 776 MHz to 788 MHz, N(m) and N(f), 50 Ω   |
| 2000-1736-R | Bandpass Filter, 815 MHz to 850 MHz, N(m) and N(f), 50 Ω   |
| 2000-1737-R | Bandpass Filter, 1711 MHz to 1756 MHz, N(m) and N(f), 50 Ω |
| 2000-1738-R | Bandpass Filter, 1850 MHz to 1910 MHz, N(m) and N(f), 50 Ω |
| 2000-1739-R | Bandpass Filter, 880 MHz to 915 MHz, N(m) and N(f), 50 Ω   |
| 2000-1740-R | Bandpass Filter, 1710 MHz to 1785 MHz, N(m) and N(f), 50 Ω |
| 2000-1741-R | Bandpass Filter, 1920 MHz to 1980 MHz, N(m) and N(f), 50 Ω |
| 2000-1742-R | Bandpass Filter, 832 MHz to 862 MHz, N(m) and N(f), 50 Ω   |
| 2000-1743-R | Bandpass Filter, 2500 MHz to 2570 MHz, N(m) and N(f), 50 Ω |
| 2000-1799-R | Bandpass Filter, 2305 MHz to 2320 MHz, N(m) and N(f), 50 Ω |
| 2000-1911-R | Bandpass Filter, 703 MHz to 748 MHz, N(m) and N(f), 50 Ω   |
| 2000-1912-R | Bandpass Filter, 788 MHz to 798 MHz, N(m) and N(f), 50 Ω   |
| 2000-1925-R | Bandpass Filter, 663 MHz to 698 MHz, N(m) and N(f), 50 Ω   |
| 2000-1926-R | Bandpass Filter, 776 MHz to 806 MHz, N(m) and N(f), 50 Ω   |



**Precision Adapters**




| Part Number | Description   |
|-------------|---|
| 34NN50A     | Precision Adapter, N(m) to N(m), DC to 18 GHz, 50 Ω |
| 34NFN50     | Precision Adapter, N(f) to N(f), DC to 18 GHz, 50 Ω |

**Adapters**




| Part Number | Description   |
|-------------|---|
| 1091-26-R   | DC to 18 GHz, N(m) to SMA(m), 50 Ω                  |
| 1091-27-R   | DC to 18 GHz, N(m) to SMA(f), 50 Ω                  |
| 1091-80-R   | DC to 18 GHz, N(f) to SMA(m), 50 Ω                  |
| 1091-81-R   | DC to 18 GHz, N(f) to SMA(f), 50 Ω                  |
| 1091-172-R  | DC to 1.3 GHz, N(m) to BNC(f), 50 Ω                 |
| 1091-417-R  | DC to 6 GHz, N(m) to QMA(f), 50 Ω                   |
| 1091-418-R  | DC to 18 GHz, N(m) to QMA(m), 50 Ω                  |
| 510-90-R    | DC to 7.5 GHz, 7/16 (f) to N(m), 50 Ω               |
| 510-91-R    | DC to 7.5 GHz, 7/16 (f) to N(f), 50 Ω               |
| 510-92-R    | DC to 7.5 GHz, 7/16 (m) to N(m), 50 Ω               |
| 510-93-R    | DC to 7.5 GHz, 7/16 (m) to N(f), 50 Ω               |
| 510-96-R    | DC to 7.5 GHz, 7/16 DIN(m) to 7/16 DIN(m), 50 Ω     |
| 510-97-R    | DC to 7.5 GHz, 7/16 DIN(f) to 7/16 DIN(f), 50 Ω     |
| 71693-R     | DC to 18 GHz, Ruggedized adapter, K(f) - N(f), 50 Ω |
| 510-102-R   | DC to 11 GHz, N(m)-N(m), 90 degrees, 50 Ω           |

**Attenuators**

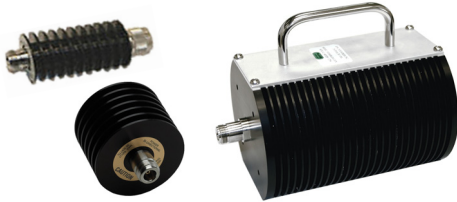

| Part Number | Description   |
|-------------|---|
| 3-1010-122  | 20 dB, 5 W, DC to 12.4 GHz, N(m) to N(f)  |
| 42N50-20    | 20 dB, 5 W, DC to 18 GHz, N(m) to N(f)  |
| 42N50A-30   | 30 dB, 50 W, DC to 18 GHz, N(m) to N(f)   |
| 3-1010-123  | 30 dB, 50 W, DC to 8.5 GHz, N(m) to N(f)  |
| 1010-127-R  | 30 dB, 150 W, DC to 3 GHz, N(m) to N(f)   |
| 1010-121-R  | Attenuator, 40 dB, 100 W, DC-18 GHz, N(f) input - N(m) output, UniDirectional   |
| 3-1010-124  | Attenuator, 40 dB, 100 W, DC-8.5 GHz, N(f) input - N(m) output, Uni-directional |
| 1010-128-R  | 40 dB, 150 W, DC to 3 GHz, N(m) to N(f)   |

**NEON® MA8100A Signal Mapper**

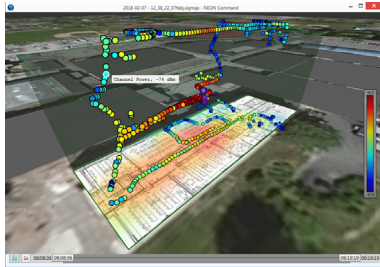

**Model Number Description**

- MA8100A-000 NEON Signal Mapper with Anritsu Integration and Tracking Unit. Includes 1 year NEON Software License with 1 year of maintenance and support and 1 year of Cloud Service (PN: 2300-607).
- MA8100A-001 NEON Signal Mapper with Anritsu Integration and Tracking Unit. Includes 1 year NEON Software License with 1 year of maintenance and support and 1 year of Cloud Service (PN: 2300-574).
- MA8100A-003 NEON Signal Mapper with Anritsu Integration and Tracking Unit. Includes 3 year NEON Software License with 3 years of maintenance and support and 3 years of Cloud Service (PN: 2300-575).
- MA8100A-005 NEON Signal Mapper with Anritsu Integration and Tracking Unit. Includes 5 year NEON Software License with 5 years of maintenance and support and 5 years of Cloud Service (PN: 2300-576).
- MA8100A-100 NEON Signal Mapper with Anritsu Integration and Tracking Unit. Includes Perpetual NEON Software License with 3 years of maintenance and support and 3 years of Cloud Service (PN: 2300-606).
  - 2300-606 Perpetual NEON Software License with 3 years of maintenance and support and 3 years of Cloud Service. Part number can also be used to order a perpetual license after a limited term license has expired.
  - 2300-612 Renewal of 1 year NEON Software License with 1 year of maintenance and support and 1 year of Cloud Service.
  - 2300-613 Renewal of 3 year NEON Software License with 3 years of maintenance and support and 3 years of Cloud Service.
  - 2300-614 Renewal of 5 year NEON Software License with 5 years of maintenance and support and 5 years of Cloud Service.
- 2000-1852-R NEON Tracking Unit (includes USB cable and belt clip, Worldwide version)
- 2000-2015-R NEON Tracking Unit (includes USB cable and belt clip, Japan version)
- 2000-1853-R Belt clip (for NEON Tracking Unit)

## Training at Anritsu

Anritsu has designed courses to help you stay up to date with technologies important to your job. For available training courses, visit: [www.anritsu.com/training](http://www.anritsu.com/training).



### • United States

**Anritsu Americas Sales Company**  
450 Century Parkway, Suite 190  
Allen, TX 75013, U.S.A.  
Phone: +1-800-Anritsu (1-800-267-4878)

### • Canada

**Anritsu Electronics Ltd.**  
700 Silver Seven Road, Suite 120  
Kanata, Ontario K2V 1C3, Canada  
Phone: +1-613-591-2003  
Fax: +1-613-591-1006

### • Brazil

**Anritsu Elettronica Ltda.**  
Praça Amadeu Amaral, 27 - 1 Andar  
01327-010 - Bela Vista - Sao Paulo - SP  
Brazil  
Phone: +55-11-3283-2511  
Fax: +55-11-3288-6940

### • Mexico

**Anritsu Company, S.A. de C.V.**  
Blvd Miguel de Cervantes Saavedra #169 Piso 1,  
Col. Granada  
Mexico, Ciudad de Mexico, 11520, MEXICO  
Phone: +52-55-4169-7104

### • United Kingdom

**Anritsu EMEA L td.**  
200 Capability Green  
Luton, Bedfordshire, LU1 3LU, U.K.  
Phone: +44-1582-433200  
Fax: +44-1582-731303

### • France

**Anritsu S.A.**  
12 avenue du Québec, Bâtiment Iris 1- Silic 612,  
91140 Villebon-sur-Yvette, France  
Phone: +33-1-60-92-15-50  
Fax: +33-1-64-46-10-65

### • Germany

**Anritsu GmbH**  
Nemetschek Haus, Konrad-Zuse-Platz 1  
81829 München, Germany  
Phone: +49-89-442308-0  
Fax: +49-89-442308-55

### • Italy

**Anritsu S.r.l.**  
Via Elio Vittorini 129, 00144 Roma, Italy  
Phone: +39-6-509-9711  
Fax: +39-6-502-2425

List Revision Date: 20200602

### • Sweden

**Anritsu AB**  
Isafjordsgatan 32C  
164 40 Kista, Sweden  
Phone: +46-8-534-707-00

### • Finland

**Anritsu AB**  
Teknobulevardi 3-5  
FI-01530 Vantaa, Finland  
Phone: +358-20-741-8100  
Fax: +358-20-741-8111

### • Denmark

**Anritsu A/S**  
c/o Regus Winghouse, Ørestads Boulevard 73, 4th  
floor,  
2300 Copenhagen S, Denmark  
Phone: +45-7211-2200

### • Russia

**Anritsu EMEA Ltd.**  
**Representation Office in Russia**  
Tverskaya str. 16/2, bld. 1, 7th floor  
Moscow 125009, Russia  
Phone: +7-495-363-1694  
Fax: +7-495-935-8962

### • Spain

**Anritsu EMEA Ltd.**  
**Representation Office in Spain**  
Paseo de la Castellana, 141.  
Planta 5, Edificio Cuzco IV  
28046, Madrid, Spain  
Phone: +34-91-572-6761

### • United Arab Emirates

**Anritsu EMEA Ltd.**  
**Dubai Liaison Office**  
902 Aurora Tower  
P O Box: 500311- Dubai Internet City  
Dubai, United Arab Emirates  
Phone: +971-4-3758479  
Fax: +971-4-4249036

### • India

**Anritsu India Private Limited**  
6th Floor, Indique ETA, No.38/4  
Adjacent to EMC2, Doddanekundi, Outer Ring Road  
Bengaluru 560048, India  
Phone: +91-80-6728-1300  
Fax: +91-80-6728-1301

### • Singapore

**Anritsu Pte. Ltd.**  
11 Chang Charn Road, #04-01, Shriro House  
Singapore 159640  
Phone: +65-6282-2400  
Fax: +65-6282-2533

### • P.R. China (Shanghai)

**Anritsu (China) Co., Ltd.**  
Room 2701-2705, Tower A  
New Caohejing International Business Center  
No. 391 Gui Ping Road  
Shanghai 200233, P.R. China  
Phone: +86-21-6237-0898  
Fax: +86-21-6237-0899

### • P.R. China (Hong Kong)

**Anritsu Company Ltd.**  
Unit 1006-7, 10/F.  
Greenfield Tower, Concordia Plaza  
No. 1 Science Museum Road  
Tsim Sha Tsui East, Kowloon  
Hong Kong, P.R. China  
Phone: +852-2301-4980  
Fax: +852-2301-3545

### • Japan

**Anritsu Corporation**  
8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016  
Japan  
Phone: +81-46-296-6509  
Fax: +81-46-225-8352

### • South Korea

**Anritsu Corporation, Ltd.**  
5FL, 235 Pangyoeyeok-ro  
Bundang-gu, Seongnam-si  
Gyeonggi-do 13494, South Korea  
Phone: +82-31-696-7750  
Fax: +82-31-696-7751

### • Australia

**Anritsu Pty. Ltd.**  
Unit 20, 21-35 Ricketts Road  
Mount Waverley, Victoria 3149, Australia  
Phone: +61-3-9558-8177  
Fax: +61-3-9558-8255

### • Taiwan

**Anritsu Company Inc.**  
7F, No. 316, Sec. 1, NeiHu Rd. Taipei 114, Taiwan  
Phone: +886-2-8751-1816  
Fax: +886-2-8751-1817

Data subject to change without notice.  
For the most recent specifications, visit: [www.anritsu.com](http://www.anritsu.com).

MS2720T TDS, PN: 11410-00646, Rev. AJ

Copyright November 2020, Anritsu Company, USA. All Rights Reserved.

® Anritsu All trademarks are registered trademarks of their respective companies.

Anritsu utilizes recycled paper and environmentally conscious inks and toner.