

# Waveguide to Coax Adapter

# **QWCA-650-SF-E** WR-650 to SMA female, End launch

Features: \* Low VSWR

- Applications:
- \* Wireless
- \* Transmitter \* Laboratory Test
- \* Radar

### Electrical

Frequency: 1.13~1.73GHz VSWR: 1.2 max. Impedance: 50Ω


## How To Order QWCA-650-SF-E

Customization is available upon request.

#### Mechanical

Length:	160mm
	6.299in
RF Connectors:	SMA Female
Interface:	WR-650
Flange:	FDP14
Material:	Aluminium

### **Outline Drawings**

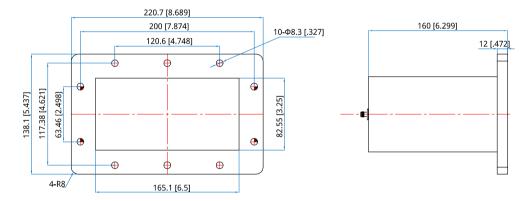

Unit: mm [in] Tolerance: ±0.2mm [±0.008in]