

## QWCA-159-SF-E

WR-159 to SMA female, End launch

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

### Electrical

Frequency: 4.64–7.05GHz  
VSWR: 1.2 max.  
Impedance: 50Ω

### How To Order


**QWCA-159-SF-E**

Customization is available upon request.

### Mechanical

Length: 65mm  
2.559in  
RF Connectors: SMA Female  
Interface: WR-159  
Flange: FDP58  
Material: Aluminium

### Outline Drawings

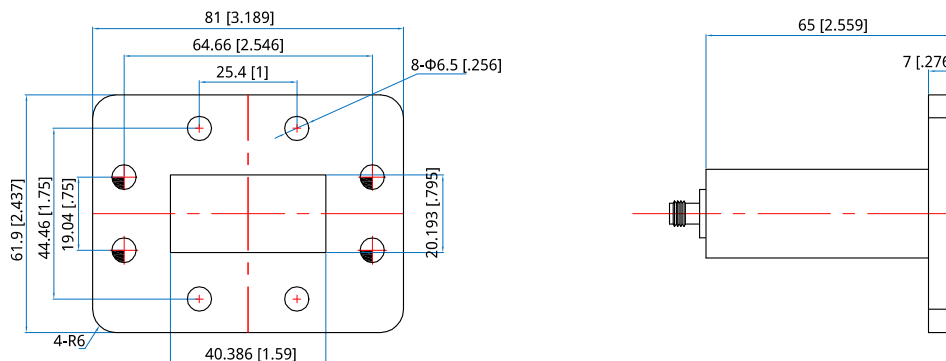

Unit: mm [in]    Tolerance: ±0.2mm [±0.008in]