

# QA44

## 4.3/10 to 4.3/10

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

### Electrical

Frequency: DC~6GHz  
VSWR: 1.1 max. @DC~3GHz  
Impedance: 50Ω

### Mechanical

RF Connectors: 4.3/10  
Outer Conductor: Ternary alloy plated brass  
Dielectric: PTFE  
Inner Conductor: Silver plated phosphor bronze or Silver alloy plated brass

### How To Order


**QA44-MM** - 4.3/10(m) to 4.3/10(m), Outline A

**QA44-MF** - 4.3/10(m) to 4.3/10(f), Outline B

**QA44-FF** - 4.3/10(f) to 4.3/10(f), Outline C

Customization is available upon request.

### Outline Drawings

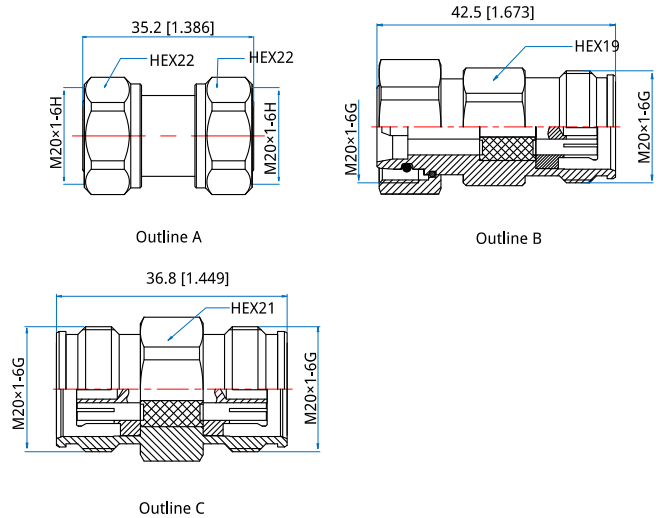

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]