

QBT-200-12000-S

0.2~12GHz

Features:
 * Broadband
 * Small Size

Applications:
 * Telecom
 * Satcom
 * Laboratory Test
 * Instrumentation

Electrical

Frequency: 0.2~12GHz
 Insertion Loss: 0.6dB max.
 VSWR: 1.8 max.
 Power Consumption: 5W max.
 Average Power: 10W max.

Mechanical


Size^{*1}: 30*20*12mm
 1.181*0.787*0.472in
 RF Connectors: SMA
 Power Supply & Control Interface: Solder Pin & Terminal Post
 Mounting: 2-Φ2.8mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature: -40~+70°C
 Non-operating Temperature: -55~+85°C

Outline Drawings

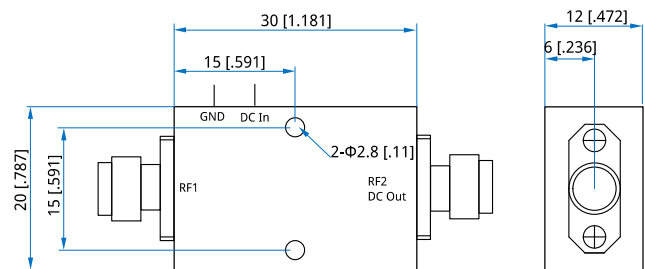

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

How To Order

QBT-200-12000-S

Customization is available upon request.