

QA22 2.4mm to 2.4mm

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~50GHz
VSWR: 1.25 max.
Impedance: 50Ω

Mechanical

RF Connectors: 2.4mm
Mating Life Cycle: 500 cycles
Outer Conductor: Passivated stainless steel
Dielectric: PEI
Inner Conductor: Gold plated beryllium copper or gold plated brass

How To Order


- QA22-MM** - 2.4mm(m) to 2.4mm(m), Outline A
- QA22-MF** - 2.4mm(m) to 2.4mm(f), Outline B
- QA22-FF** - 2.4mm(f) to 2.4mm(f), Outline C
- QA22R-MM** - 2.4mm(m) to 2.4mm(m), right angle, Outline D
- QA22R-MF** - 2.4mm(m) to 2.4mm(f), right angle, Outline E
- QA22L-FF** - 2.4mm(f) to 2.4mm(f), flange mount, Outline G
- QA22H-FF** - 2.4mm(f) to 2.4mm(f), bulk head, Outline H

Customization is available upon request.

Environmental

Temperature: -60~+165°C

Outline Drawings

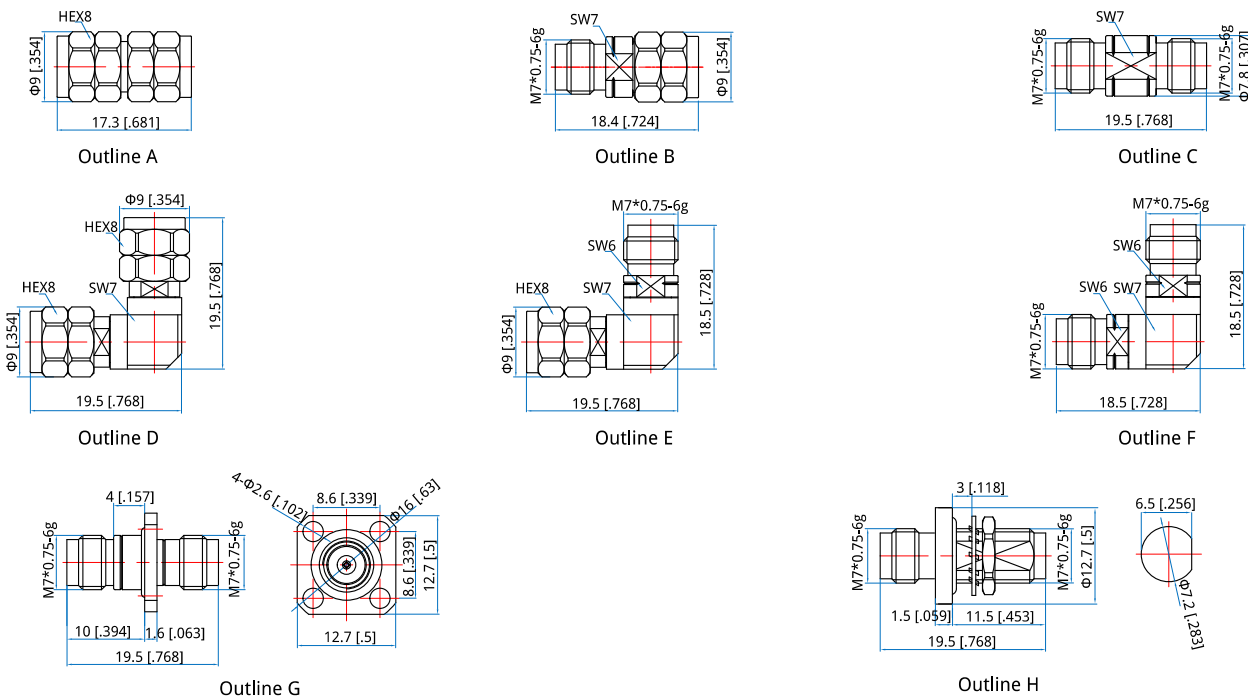

Unit: mm [in] Tolerance: ± 0.2 mm [± 0.008 in]