

# QWCA-137-SF-E

## WR-137 to SMA female, End launch

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

### Electrical

Frequency: 5.37–8.17GHz  
VSWR: 1.2 max.  
Impedance: 50Ω

### Mechanical


Length: 60mm  
2.362in  
RF Connectors: SMA Female  
Interface: WR-137  
Flange: FDP70  
Material: Aluminium

### How To Order

[QWCA-137-SF-E](#)

Customization is available upon request.

### Outline Drawings

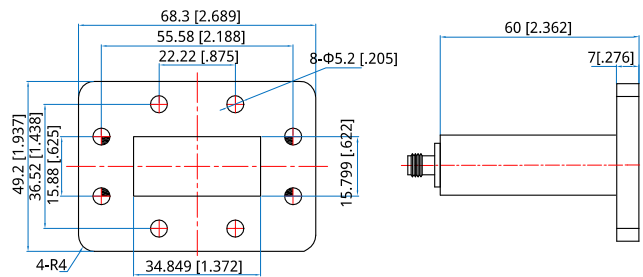

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]