

## QWCA-34-2F-E

### WR-34 to 2.4mm Female, End Launch

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

#### Electrical

Frequency: 21.7~33GHz  
VSWR: 1.2 max.  
Impedance: 50Ω

#### Mechanical


Length: 28mm  
1.102in  
RF Connectors: 2.4mm Female  
Interface: WR-34  
Flange: FBP260  
Material: Copper

#### How To Order

**QWCA-34-2F-E**

Customization is available upon request.

#### Outline Drawings

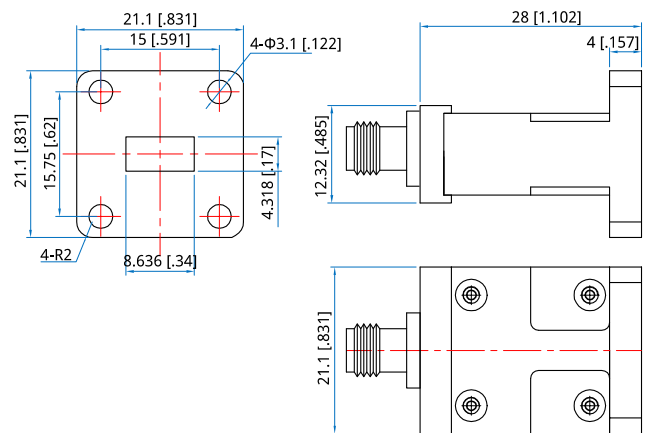

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]