

QCT1825

DC~18GHz, 25W

Features:
 * Low VSWR
 * Broadband

Applications:
 * Transmitters
 * Antennas
 * Laboratory Test
 * Impedance Matching



Electrical

Frequency Range: DC~18GHz
 Average Power*1: 25W@25°C max.
 Impedance: 50Ω

[1] Derated linearly to 1.25W@120°C.

VSWR

| Frequency (GHz) | VSWR (max.) |
|-----------------|-------------|
| DC~4 | 1.20 |
| DC~8 | 1.25 |
| DC~12.4 | 1.35 |
| DC~18 | 1.40 |


Mechanical

Connectors: N, SMA

Environmental

Temperature: -55~+125°C

Outline Drawings

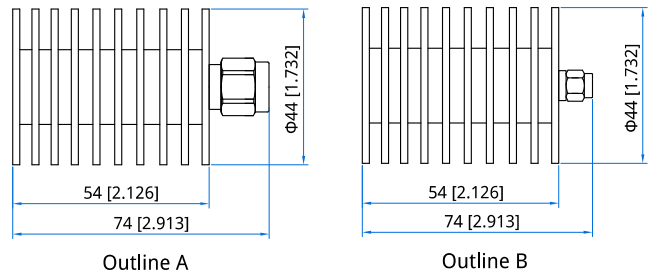

Unit: mm [in]
 Tolerance: ±1.5mm [±0.06in]

How To Order

QCT1825-X-Y

X: Frequency in GHz

Y: Connector type

Connector naming rules:

N - N male (Outline A)

NF - N female

S - SMA male (Outline B)

SF - SMA female

Examples:

To order a termination, DC~18GHz, SMA male, specify QCT1825-18-S.

Customization is available upon request.