

QFA2610

DC~26.5GHz, 10W

Features:

- * Low VSWR
- * High Attenuation Flatness

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	DC~26.5GHz
Attenuation:	1~70dB
Impedance:	50Ω
Average Power*1:	10W@25°C max.

[1] Derated linearly to 0.5W@120°C.


Mechanical

RF Connectors:	SMA, 3.5mm
Housing:	Aluminum
Outer Conductor:	Passivated stainless steel or gold/nickel plated brass
Male Inner Conductor:	Gold plated brass
Female Inner Conductor:	Gold plated beryllium copper


Environmental

Temperature:	-55~+85°C
--------------	-----------

Outline Drawings

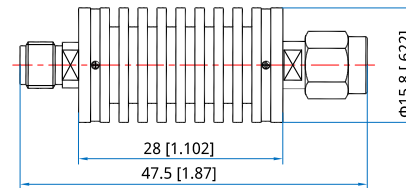

Outline A

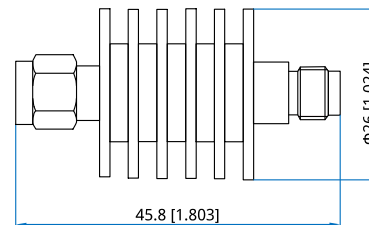

Outline B

Unit: mm [in]
Tolerance: ±2mm [±0.08in]

Attenuation Accuracy and VSWR (SMA)

Frequency (GHz)	Attenuation Accuracy (±dB) vs. Attenuation (dB)				VSWR (max.)
	1~10	11~20	21~30	31~40	
DC~4	±0.7	±0.7	±0.7	±0.7	1.15
DC~8	±0.7	±0.7	±0.7	±0.8	1.2
DC~12.4	±0.8	±0.8	±0.9	±0.9	1.25
DC~18	±1	±1	±1	±1.2	1.3
DC~26.5	±1	±1.1	±1.2	±1.3	1.35

Attenuation Accuracy and VSWR (3.5mm)

Frequency (GHz)	Attenuation Accuracy (±dB) vs. Attenuation (dB)						VSWR (max.)
	1~10	20, 30	40	50	60	70	
DC~12.4	±0.6	±0.5	-0.5/+0.7	±1	-1/+1.5	-1.2/+1.5	1.15
DC~18	±0.8	±0.8	-0.5/+1	-1/+1.2	-1/+1.5	-1.2/+1.5	1.2
DC~26.5	±1	-0.5/+1.2	-0.5/+1.2	-1/+1.5	-1/+1.5	-1.2/+1.8	1.25

How To Order

QFA2610-X-Y-Z

- X: Frequency in GHz
- Y: Attenuation in dB
- Z: Connector type

Connector naming rules:

- S - SMA (Outline A)
- 3 - 3.5mm (Outline B)

Examples:

To order an attenuator, DC~26.5GHz, SMA male to SMA female, 20dB attenuation, specify QFA2610-26.5-20-S.